



General

Product Type	Wireless
--------------	----------

Electronics

Power Supply	N/A
--------------	-----

Lighting

Color Range	Single Color
-------------	--------------

Control

Output Signal	RF
Control	Manual
Remote Distance	30m
Functions	Remote, Wall-mount

Environmental

Operating Temperature	-20 ~ +50 °C
Ingress Protection	IP20
Battery	1x CR2032

CE

IP20

5^{year}
warranty

Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.




2.4G LED Dimming Controller



Main Characteristics


V5 RF Dimming Remote Control

Remote Option: Dimming, 4 Zones control
 Working Voltage: 3Vdc (Battery CR2032)
 Wireless Frequency: 2.4GHz
 Working Temperature: -30°C~55°C
 Package Size: L150×W46×H18(mm)
 Weight(G.W.): 85g

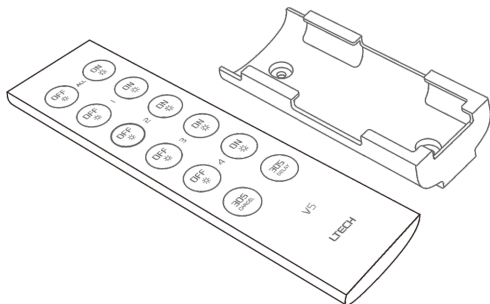


R4-3A CV Receiver

Input Voltage: 5~24Vdc
 Max Current Load: 3A × 4CH Max. 12A
 Max Output Power: 60W/144W/288W(5V/12V/24V)
 Working Temperature: -30°C~55°C
 Package Size: L127×W35×H24(mm)
 Weight(G.W.): 60g



R4-3A



R4-5A/R4-CC

R4-5A CV Receiver


Input Voltage: 5~24Vdc
 Max Current Load: 5A × 4CH Max. 20A
 Max Output Power: 100W/240W/480W(5V/12V/24V)
 Working Temperature: -30°C~55°C
 Package Size: L178×W48×H33(mm)
 Weight(G.W.): 150g

R4-CC CC Receiver


Input Voltage: 12~48Vdc
 Output Voltage: 3~46Vdc
 Output Current: CC 350/700/1050mA×4CH
 Output Power: 1.05W~48.3W×4CH Max 193.2W
 Working Temperature: -30°C~55°C
 Package Size: L178×W48×H33(mm)
 Weight(G.W.): 165g

Note: Receiver is sold separately.


Dimensions




V5



Holder




R4-5A/R4-CC




R4-3A


Operating Instruction for Remote:

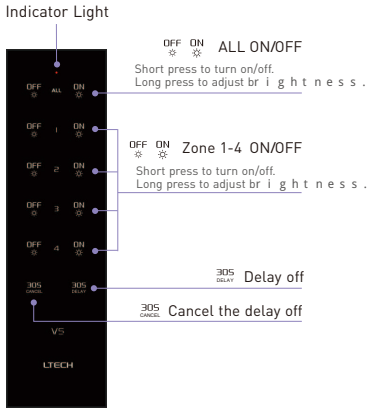

Operating Instruction for Receiver:

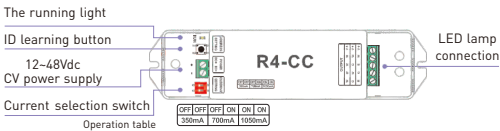

Wiring Diagram :

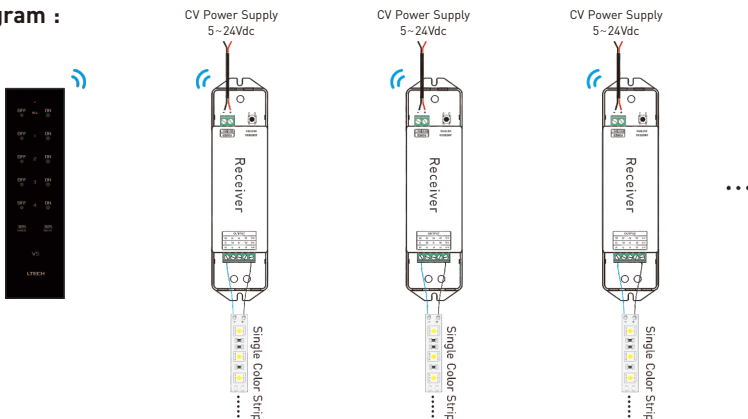


Attention:


- Please replace the battery if the remote becomes insensitive or control distance is shortened.
- Please take out the battery for long time unused.

Match/Clear code between remotes

Match code:

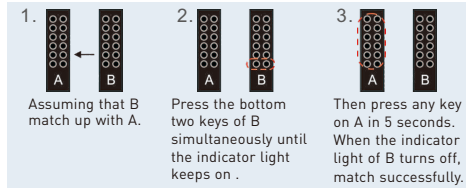


Clear code:



Match/Clear code between remote and receiver

Match code:

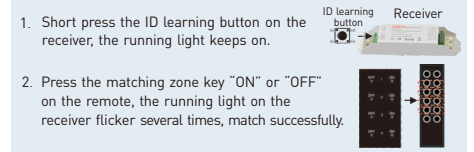

Clear code:

