



General

Length (mm)	98
Diameter (mm)	50
Built-in Diameter (mm)	62
Cover	8mm step tempered glass, Stainless steel (SUS316),
Housing Color	Silver
Housing Material	Aluminum / ABS
Mounting	Built-in
Weight (g)	240
Diameter Mounting Sleeve (mm)	62
Length Mounting Sleeve (mm)	95
Cut-out (mm)	63
Cable Color	Black
Cable Length (cm)	50 cm
Cable Type	H05RN-F3xG0.75

Electronics

Input Domain	AC
Input Voltage	100 ~ 240V AC
Power Consumption (W)	3
Power Supply	Internal
Luminous Efficacy	48 lm/W

Lighting

Optics (°)	15
Chip Brand	CREE
LED Type	Power LED
LED Quantity	1
Color Range	White
Color Temperature (Kelvin)	3000 K
Colour Rendering Index (CRI)	82
Luminous Flux	145 lm
Light Distributor	Other
Light Sharing	Symmetric

Control

Control	on-off (non dimmable)
Number of Channels	1

Environmental

Storage Temperature	-20 ~ +40 °C
Operating Temperature	-20 ~ +40 °C
Impact Protection	IK07
Ingress Protection	IP67



IP67 2^{year} warranty

Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.



Installation Instruction

Model: 34601
Input : AC100-240V
Power: 1x3W

CE




IP67

CREE



Safety Notice:

Please read the installation instruction before installing the inground.
The installation should be done by a professional.
Failure to comply with the instruction may result in damage, fire or personal injury.


1. While using the products please pay attention to the input voltage.
2. Please use our local standard identification cable. Pay attention that it must be higher than the input voltage and constant current of the product.
3. Please turn off the power before installing, repairing or replacing the ingroud.
4. If parts need to be replaced or repaired, please use the specified parts from the supplier. The changes should be applied by a professional.

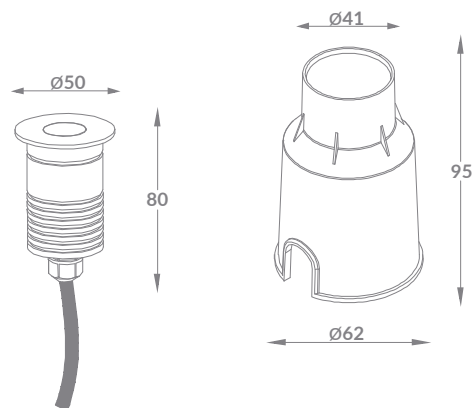


1





2

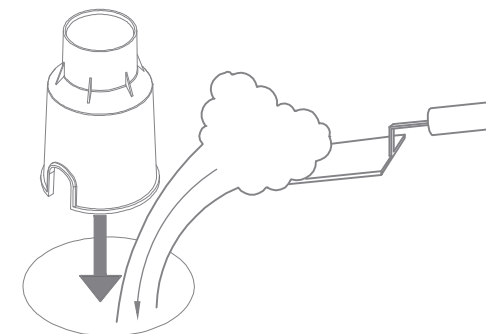

3

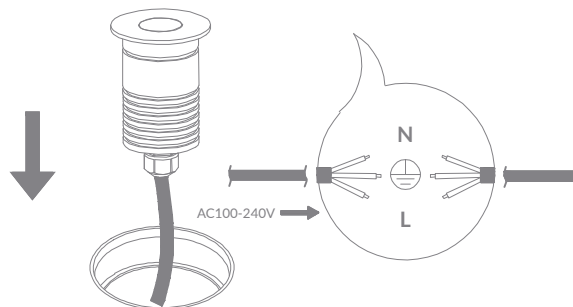

4



gravel recommended!

