



General

Product Type	Converter
--------------	-----------

Electronics

Power Supply	N/A
LED Outputs	3

Control

Output Signal	PWM, 0~5V
Control	PWM, 0~10V
Dimming Range	0~100%

Environmental

Operating Temperature	-30 ~ +55 °C
-----------------------	--------------

CE


5 year warranty

Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.

LT-3060-PWM5V

LED Dimming Signal Converter

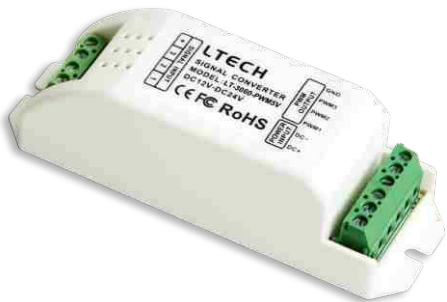

LT-3060-PWM5V is a high performance dimming signal converter, to convert power PWM or 0-10V PWM convert to 5V PWM dimming signal. By using this product, one dimming control system could control multiple drivers or LED lamps in different dimming signal.

1. Product parameter

LT-3060-PWM5V	
Working voltage	DC12V~DC24V
Signal input	PWM x3CH(compatible with CV/CC Power PWM and Signal PWM)
Signal Output	5V PWM x3CH
Dimming range	0~100%
Working temperature	-30℃~55℃
Product size	L121×W39×H39(mm)
Package size	L123×W42×H42(mm)
Weight(G.W)	80g

2. Conjunction Diagram

PWM Input

Connect to the LED dimmer or LED driver with PWM signal output

5V Output

Connect to LED Lamps or Driving Device with 5V PWM signal

