



General

|                  |                         |
|------------------|-------------------------|
| Product Type     | Constant Current Driver |
| Length (mm)      | 167                     |
| Width (mm)       | 39                      |
| Height (mm)      | 30                      |
| Housing Color    | White                   |
| Housing Material | Plastic                 |
| Mounting         | Surface mounted         |
| Weight (g)       | 175                     |

Electronics

|                                |               |
|--------------------------------|---------------|
| Input Domain                   | AC            |
| Input Voltage                  | 220 ~ 240V AC |
| Output Voltage                 | 10 ~ 54V DC   |
| Output Current (mA) max/output | 200~1200      |
| Output Power Range (W)         | 2~36          |
| Power Supply                   | Internal      |
| LED Outputs                    | 1             |

Lighting

|             |              |
|-------------|--------------|
| Color Range | Single Color |
|-------------|--------------|

Control

|                    |        |
|--------------------|--------|
| Output Signal      | PWM-CC |
| Control            | DMX    |
| RDM Support        | Yes    |
| Number of Channels | 1      |

Protection

|                  |    |
|------------------|----|
| Protection Class | II |
|------------------|----|

Environmental

|                    |      |
|--------------------|------|
| Ingress Protection | IP20 |
|--------------------|------|

CE IP20 2 year warranty

Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.


## LED Intelligent Driver (constant current)

- Dimming interface: DMX512/RDM, Push DIM.
- T-PWM™ digital dimming, present a perfect visual experience.
- With RDM remote device management protocol.
- Dimming range: 0-100%, LED start at 0.01% possible.
- With soft-on and fade in function, visual more comfortable.
- DIP switch for 8 optional currents' quick selection.
- 0-100% flicker-free, High frequency exemption level.
- Innovative thermal management technology, intelligent power life protection.
- Multi-current & wide voltage, suitable for different power LED.
- Short circuit / Over-heat / Over load / Non-load protection, recover automatically.
- Non-load output voltage 0V to prevent damages to LED caused by poor contact.
- Suitable for internal lights application for I / II / III.
- Up to 50000-hour life time.
- 5 years warranty (Rubycon capacitor).


**T-PWM™**  
Super depth dimming technology

**Flicker-free**  
IEEE 1789

TUV Certificate No. B 17 06 01119 001  
RCM Equipment registration No: E2017013627 Ref: ESV170365  
ENEC Certificate No. U6 17 07 01119 004  
CE EMC Certificate No. BST1702498520001Y-IEC-1  
LVD Certificate No. BST1709992470001Y-15C-2

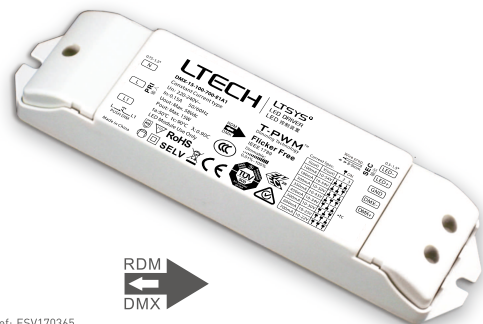

Dimmable:  
0.01~100%

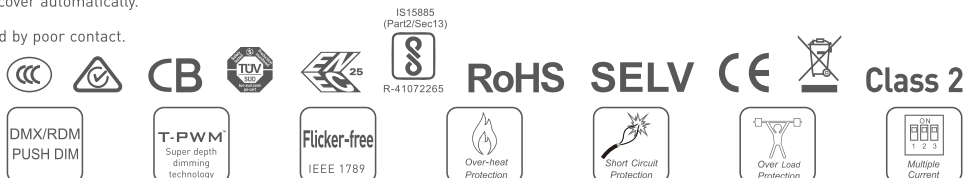

## Specification

| Model        |                          | DMX-15-100-700-E1A1                                                                                   |                  | DMX-25-150-900-E1A1                                             |  | DMX-36-200-1200-E1A1                                            |  |
|--------------|--------------------------|-------------------------------------------------------------------------------------------------------|------------------|-----------------------------------------------------------------|--|-----------------------------------------------------------------|--|
| OUTPUT       | Output Voltage           | 10-54Vdc                                                                                              |                  |                                                                 |  |                                                                 |  |
|              | Max Output Voltage       | 58Vdc                                                                                                 |                  |                                                                 |  |                                                                 |  |
|              | Non-load Output Voltage  | 0Vdc                                                                                                  |                  |                                                                 |  |                                                                 |  |
|              | Output Current           | 100-700mA                                                                                             |                  | 150-900mA                                                       |  | 200-1200mA                                                      |  |
|              | Output Power             | 1W~15W                                                                                                |                  | 1.5~25W                                                         |  | 2W~36W                                                          |  |
|              | Dimming Range            | 0~100%, LED start at 0.01% possible.                                                                  |                  |                                                                 |  |                                                                 |  |
|              | Strobe Level             | No video flicker / High frequency exemption level.                                                    |                  |                                                                 |  |                                                                 |  |
|              | PWM Dimming Frequency    | ≤3600Hz                                                                                               |                  |                                                                 |  |                                                                 |  |
|              | LF Current Ripple(120Hz) | <2%                                                                                                   |                  |                                                                 |  |                                                                 |  |
|              | Current Accuracy         | ±5%                                                                                                   |                  |                                                                 |  |                                                                 |  |
|              | Ripple & Noise           | ≤2V (no dim)                                                                                          |                  |                                                                 |  |                                                                 |  |
| INPUT        | Dimming Interface        | DMX512/RDM, Push DIM                                                                                  |                  |                                                                 |  |                                                                 |  |
|              | Input Voltage Range      | 220-240Vac                                                                                            |                  |                                                                 |  |                                                                 |  |
|              | Frequency                | 50/60Hz                                                                                               |                  |                                                                 |  |                                                                 |  |
|              | Input Current            | <0.15A                                                                                                |                  | <0.2A                                                           |  | <0.3A                                                           |  |
|              | Power Factor             | PF>0.90/230Vac, at full load                                                                          |                  | PF>0.93/230Vac, at full load                                    |  | PF>0.95/230Vac, at full load                                    |  |
|              | THD                      | ≤20% at 230Vac, at full load                                                                          |                  |                                                                 |  | ≤15% at 230Vac, at full load                                    |  |
|              | Efficiency(typ.)         | 83%                                                                                                   |                  | 84%                                                             |  | 87%                                                             |  |
|              | Inrush Current(typ.)     | Cold start 2.47A at 230Vac (twidh=24.3μs measured at 50% Ipeak)                                       |                  | Cold start 3.05A at 230Vac (twidh=34.1μs measured at 50% Ipeak) |  | Cold start 6.29A at 230Vac (twidh=57.3μs measured at 50% Ipeak) |  |
|              | Anti Surge               | L-N: 1kV                                                                                              |                  |                                                                 |  |                                                                 |  |
|              |                          | Leakage Current                                                                                       | <0.5mA/230Vac    |                                                                 |  |                                                                 |  |
| ENVIRONMENT  | Working Temperature      | ta: 50°C tc: 90°C                                                                                     |                  |                                                                 |  |                                                                 |  |
|              | Working Humidity         | 20 ~ 95%RH, non-condensing                                                                            |                  |                                                                 |  |                                                                 |  |
|              | Storage Temp., Humidity  | -40°C ~ 80°C, 10~95%RH                                                                                |                  |                                                                 |  |                                                                 |  |
|              | Temp. Coefficient        | ±0.03%/°C [0-50°C]                                                                                    |                  |                                                                 |  |                                                                 |  |
|              | Vibration                | 10~500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes                                 |                  |                                                                 |  |                                                                 |  |
| PROTECTION   | Over-heat Protection     | Intelligently adjusting or turning off the output current if the PCB temperature≥110°C, auto recovers |                  |                                                                 |  |                                                                 |  |
|              | Over Load Protection     | Shut down the output when rated power≥102%, auto recovers                                             |                  |                                                                 |  |                                                                 |  |
|              | Short Circuit Protection | Shut down automatically if short circuit occurs, auto recovers                                        |                  |                                                                 |  |                                                                 |  |
|              | Non-load Protection      | Shut down the output if no load, auto recovers when load back to normal                               |                  |                                                                 |  |                                                                 |  |
| SAFETY & EMC | Withstand Voltage        | I/P-O/P: 3750Vac                                                                                      |                  |                                                                 |  |                                                                 |  |
|              | Isolation Resistance     | I/P-O/P: 100MQ/500VDC/25°C/70%RH                                                                      |                  |                                                                 |  |                                                                 |  |
|              | Safety Standards         | CCC                                                                                                   | China            | GB19510.1, GB19510.14                                           |  |                                                                 |  |
|              |                          | TUV                                                                                                   | Germany          | EN61347-1, EN61347-2-13, EN62493                                |  |                                                                 |  |
|              |                          | CE                                                                                                    | European Union   | EN61347-1, EN61347-2-13, EN62384                                |  |                                                                 |  |
|              |                          | CB                                                                                                    | CB member states | IEC61347-1, IEC61347-2-13                                       |  |                                                                 |  |
|              |                          | RCM                                                                                                   | Australia        | AS61347-1, AS61347-2-13                                         |  |                                                                 |  |
|              |                          | ENEC                                                                                                  | Europe           | EN61347-1, EN61347-2-13, EN62384                                |  |                                                                 |  |
|              | EMC Emission             | CCC                                                                                                   | China            | GB/T17743, GB17625.1                                            |  |                                                                 |  |
|              |                          | RCM                                                                                                   | Australia        | EN550515, EN61000-3-2, EN61000-3-3, EN61547                     |  |                                                                 |  |
|              |                          | CE                                                                                                    | European Union   | EN550515, EN61000-3-2, EN61000-3-3                              |  |                                                                 |  |
|              | EMC Immunity             | EN61000-4-2,3,4,5,6,8,11 EN61547                                                                      |                  |                                                                 |  |                                                                 |  |
|              | Strobe Test Standard     | IEEE 1789                                                                                             |                  |                                                                 |  |                                                                 |  |
| OTHERS       | Dimension                | 167×41×32mm(L×W×H)                                                                                    |                  |                                                                 |  |                                                                 |  |
|              | Packing                  | 168×43×35mm(L×W×H)                                                                                    |                  |                                                                 |  |                                                                 |  |
|              | Weight(G.W.)             | 165g±10g                                                                                              |                  |                                                                 |  |                                                                 |  |

## LED Current Selection

DIP switch for 8 optional currents' quick selection(see the table below).

| DMX-15-100-700-E1A1  | DIP Switch     |           |            |          |             |            |          |              |          | <br><br>ON OFF |
|----------------------|----------------|-----------|------------|----------|-------------|------------|----------|--------------|----------|----------------|
|                      | Output Current | 100mA     | 180mA      | 300mA    | 350mA       | 450mA      | 500mA    | 600mA        | 700mA    |                |
|                      | Output Voltage | 10-54V    | 10-54V     | 10-50V   | 10-43V      | 10-34V     | 10-30V   | 10-25V       | 10-22V   |                |
|                      | Output Power   | 1W-5.4W   | 1.8W-9.72W | 3W-15W   | 3.5W-15.05W | 4.5W-15.3W | 5W-15W   | 6W-15W       | 7W-15.4W |                |
| DMX-25-150-900-E1A1  | DIP Switch     |           |            |          |             |            |          |              |          | <br><br>ON OFF |
|                      | Output Current | 150mA     | 250mA      | 300mA    | 350mA       | 500mA      | 600mA    | 700mA        | 900mA    |                |
|                      | Output Voltage | 10-54V    | 10-54V     | 10-54V   | 10-54V      | 10-50V     | 10-42V   | 10-36V       | 10-28V   |                |
|                      | Output Power   | 1.5W-8.1W | 2.5W-13.5W | 3W-16.2W | 3.5W-18.9W  | 5W-25W     | 6W-25.2W | 7W-25.2W     | 9W-25.2W |                |
| DMX-36-200-1200-E1A1 | DIP Switch     |           |            |          |             |            |          |              |          | <br><br>ON OFF |
|                      | Output Current | 200mA     | 350mA      | 500mA    | 600mA       | 700mA      | 900mA    | 1050mA       | 1200mA   |                |
|                      | Output Voltage | 10-54V    | 10-54V     | 10-54V   | 10-54V      | 10-52V     | 10-40V   | 10-35V       | 10-30V   |                |
|                      | Output Power   | 2W-10.8W  | 3.5W-18.9W | 5W-27W   | 6W-32.4W    | 7W-36.4W   | 9W-36W   | 10.5W-36.75W | 12W-36W  |                |



\* Please choose the current value when the driver is power off.

\* E.g. LED 3V/pcs: 10-54V can power 3-18pcs LEDs in series, 10-22V can power 3-7pcs LEDs, the max quantity of LEDs in series will be subject to the actual voltage of LED.

\* Setting DMX address via RDM function


## Dimensions

Unit: mm

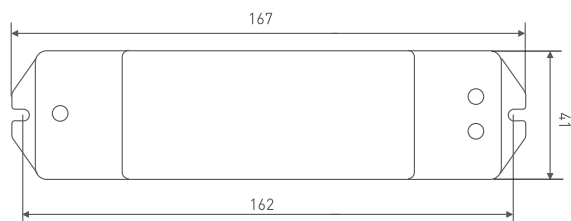


## Wiring Diagram

### DMX/RDM connection

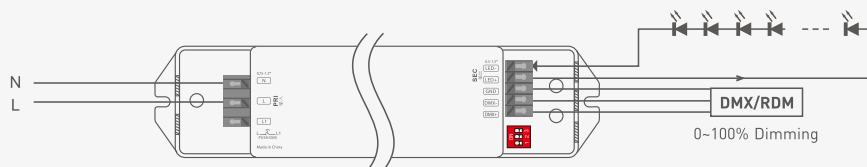

### Push DIM connection

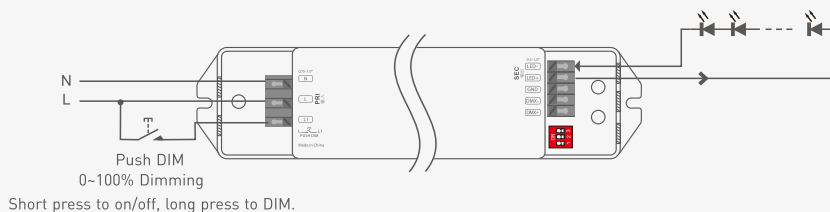

The dimming interface priority: First DMX/RDM, next Push DIM.

### Push DIM




Reset Switch

- On/off control: Short press.
- Stepless dimming: Long press.
- With every other long press, the brightness goes to the opposite direction.
- Dimming memory: Brightness will be the same as previously adjusted when turning on again.

## DMX Address Setting


The DMX driver can work with the address editor that complies with standard RDM protocol.

It is recommended to use LTECH's RDM editor (model WiFi-RDM01), which can achieve more functions such as remote browsing and parameter setting. Wiring diagram as below:

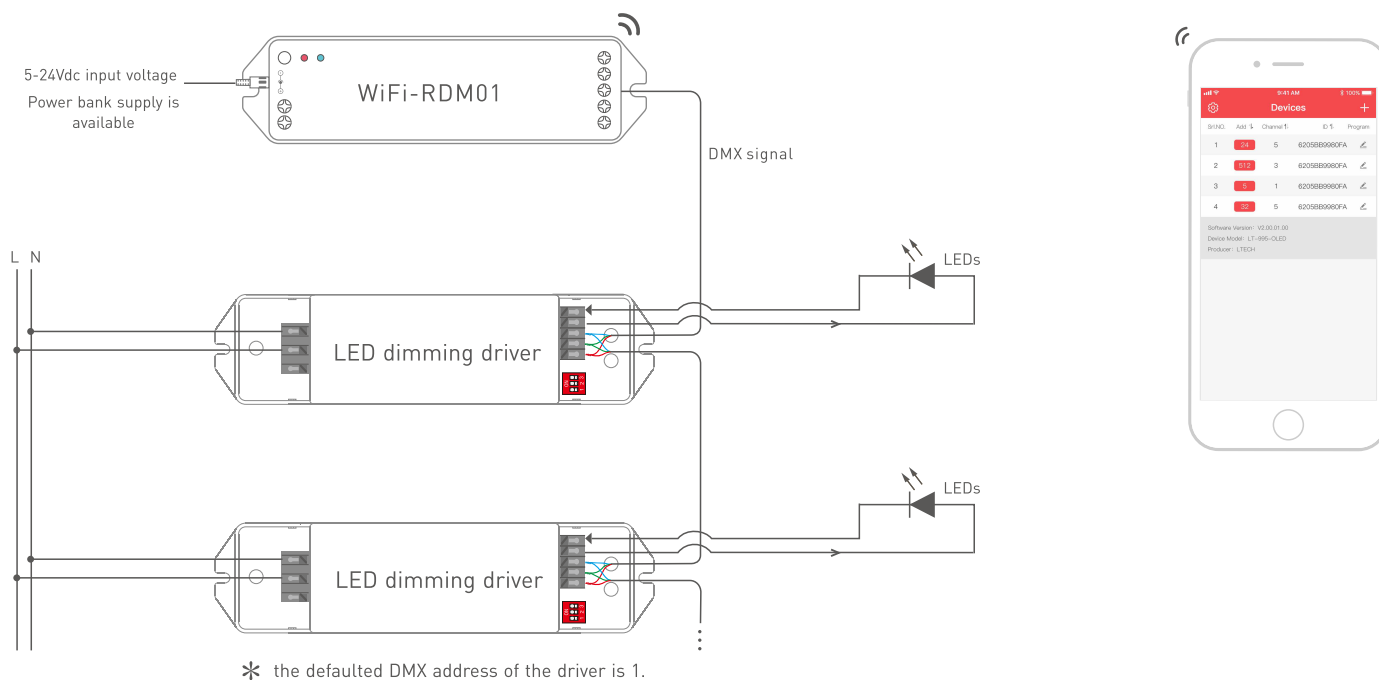

## LTECH RDM editor App interface instruction

Download the App, setting the parameters after well connecting the RDM editor, please check the manual of WiFi-RDM01 for more details.




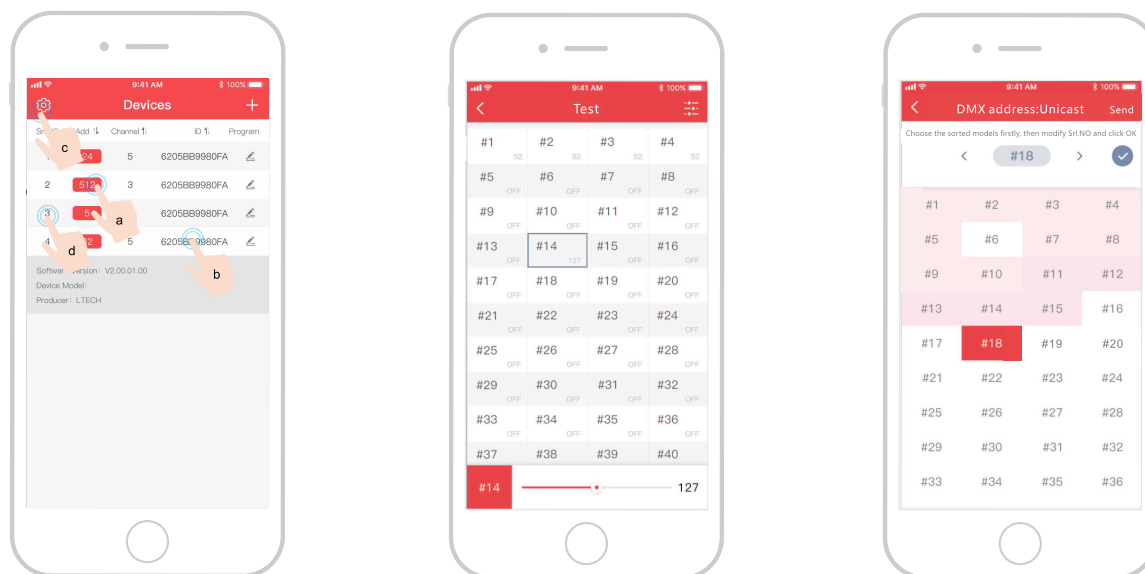


- a: Click "Add", edited the address in corresponding box.
- b: Click "ID", get more product details.
- c: Click "⚙️", enter setting interface.
- d: Click "No.", issue the recognizing command.





Test

DMX address setting





## Relationship Diagrams

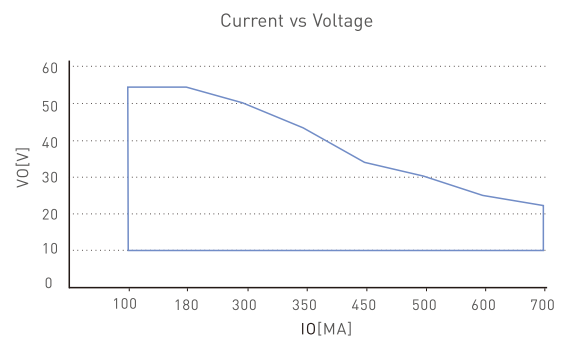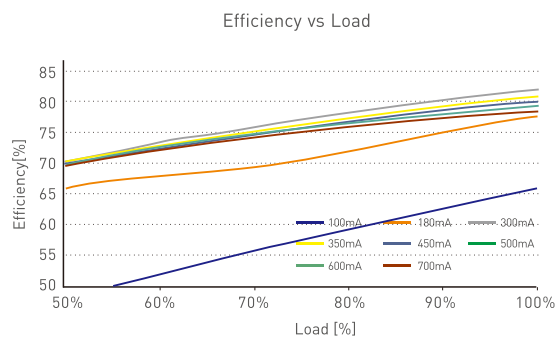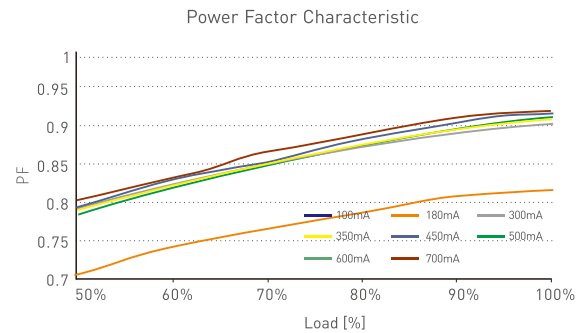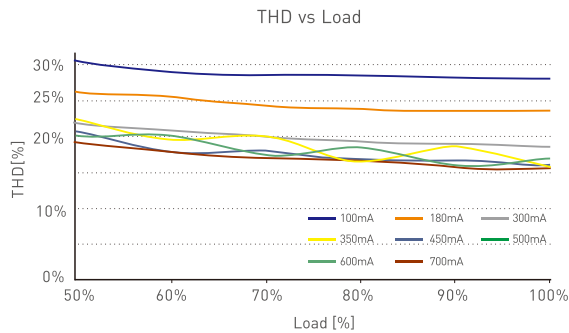

DMX-15-100-700-E1A1

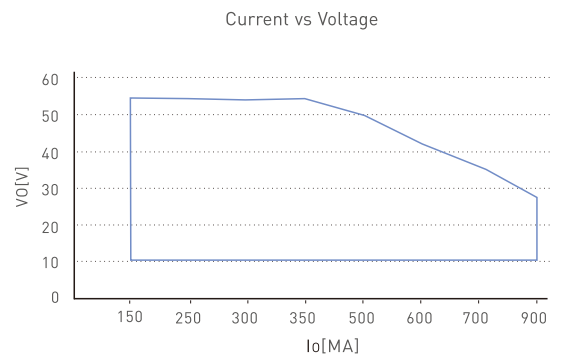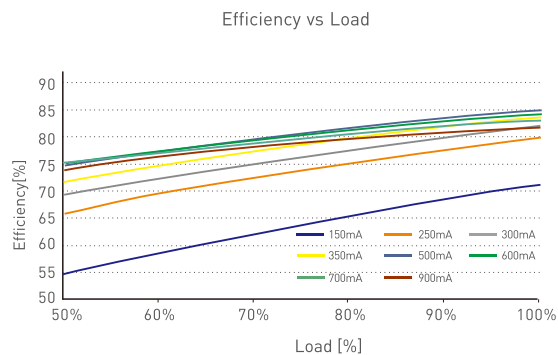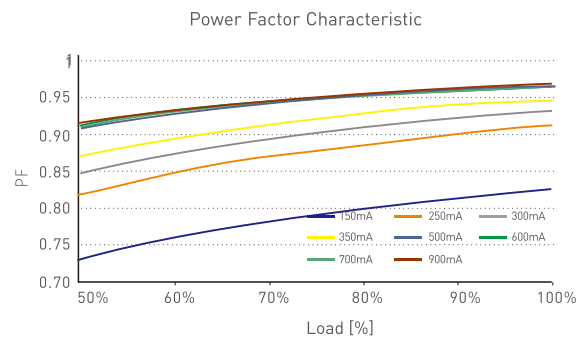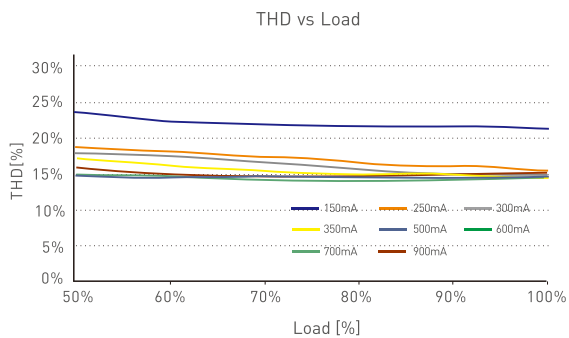

DMX-25-150-900-E1A1

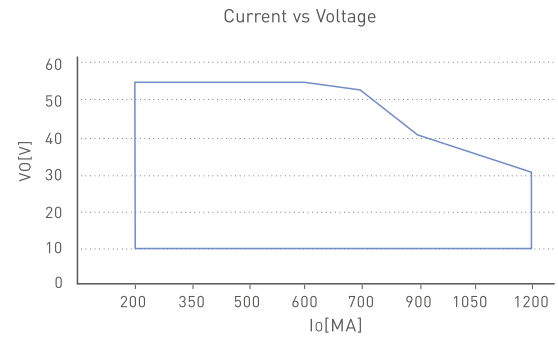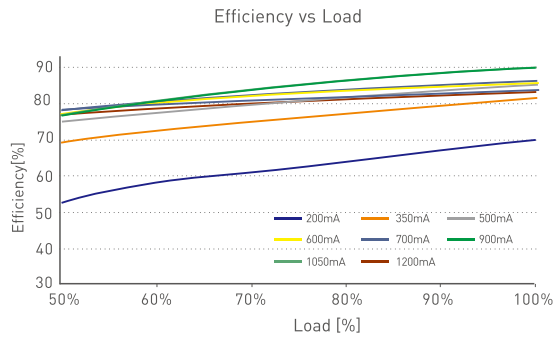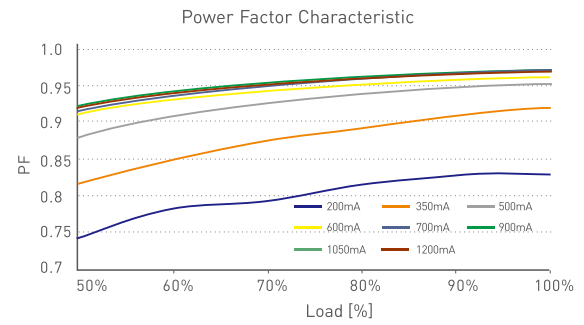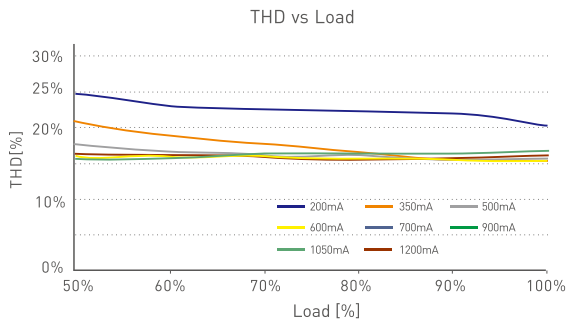

DMX-36-200-1200-E1A1


## Flicker Test Form

IEEE 1789

| Limit of Modulation in low risk area  |                                                 |
|---------------------------------------|-------------------------------------------------|
| Waveform frequency of Optical output  | limit (%)                                       |
| $f \leq 8\text{Hz}$                   | 0.2                                             |
| $8\text{Hz} < f \leq 90\text{Hz}$     | $0.025 \times f$                                |
| $90\text{Hz} < f \leq 1250\text{Hz}$  | $0.08 \times f$                                 |
| $f > 1250\text{Hz}$                   | Exemption assessment                            |
| Limit of Modulation in no effect area |                                                 |
| Waveform frequency of Optical output  | limit (%)                                       |
| $f \leq 10\text{Hz}$                  | 0.1                                             |
| $10\text{Hz} < f \leq 90\text{Hz}$    | $0.01 \times f$                                 |
| $90\text{Hz} < f \leq 3125\text{Hz}$  | $[0.08/2.5] \times f$                           |
| $f > 3125\text{Hz}$                   | Exemption assessment (High frequency exemption) |

Brightness

- ▲ 0.1%
- ▲ 1%
- ▲ 5%
- ▲ 10%
- ▲ 20%
- ▲ 30%
- ▲ 40%
- ▲ 50%
- ▲ 60%
- ▲ 70%
- ▲ 80%
- ▲ 90%
- ▲ 100%

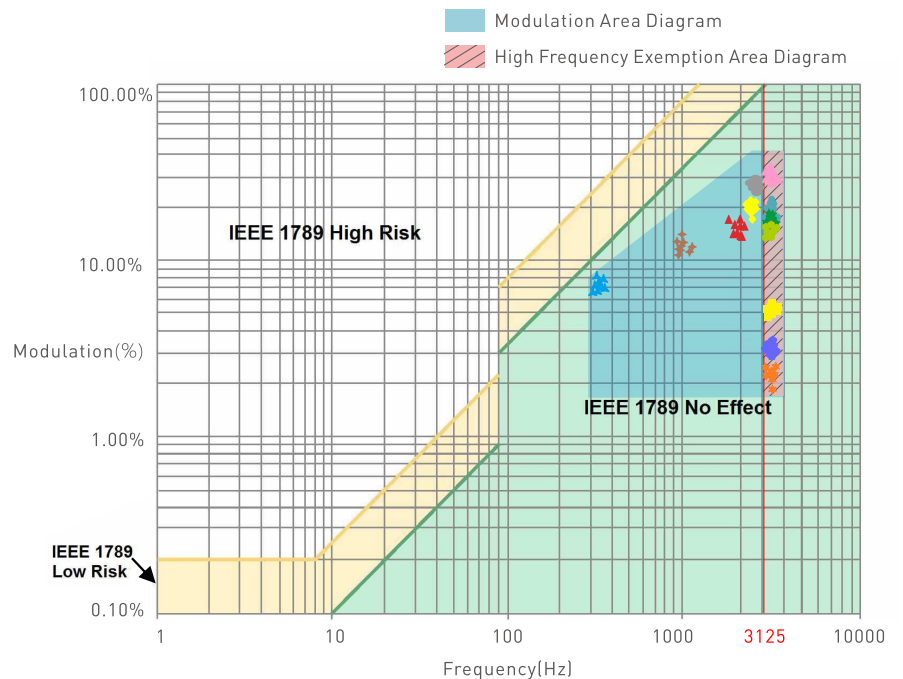

Marks in the right chart were tested results of different current ranges. The output frequency is 0Hz in 100% brightness and its corresponding modulation is 0%, which could not be shown in the right chart.

## Attentions

- Products shall be installed by qualified professionals.
  - LTECH products are non-waterproof (special models excepted). Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
  - Good heat dissipation will extend the working life of products. Please ensure good ventilation.
  - Please check if the working voltage used complies with the parameter requirements of products.
  - The diameter of wire used must be able to load the light fixtures you connect and ensure the firm wiring.
  - Before you power on products, please make sure all the wiring is correct in case of incorrect connection that causes damage to light fixtures.
  - If a fault occurs, please do not attempt to fix products by yourself. If you have any question, please contact your suppliers.
- \* This manual is subject to changes without further notice. Product functions depend on the goods. Please feel free to contact our official distributors if you have any question.

## Warranty Agreement

- Warranty periods from the date of delivery 5 years.
- Free repair or replacement services for quality problems are provided within warranty periods.

Warranty exclusions below:

- Beyond warranty periods.
- Any artificial damage caused by high voltage, overload, or improper operations.
- Products with severe physical damage.
- Damage caused by natural disasters and force majeure.
- Warranty labels and barcodes have been damaged.
- No any contract signed by LTECH.

1. Repair or replacement provided is the only remedy for customers. LTECH is not liable for any incidental or consequential damage unless it is within the law.
2. LTECH has the right to amend or adjust the terms of this warranty, and release in written form shall prevail

## Update Log

| Version | Updated Time | Update Content                                                                                | Updated by |
|---------|--------------|-----------------------------------------------------------------------------------------------|------------|
| A4      | 2019.10.24   | Add RDM editor connection diagram                                                             | Liu Weili  |
| A5      | 2021.03.02   | Update product silk screen, TUV certification icon;<br>add precautions and warranty agreement | Liu Weili  |