



General

Product Type	Constant Voltage Driver
Length (mm)	112
Width (mm)	67
Height (mm)	35
Housing Color	White
Housing Material	Plastic
Mounting	DIN-Rail
Weight (g)	115
Wire Strip Length	5mm
Wire Type	2.5mm2

Electronics

Input Domain	DC
Input Voltage	12 ~ 24V DC
Output Voltage	12 ~ 24 V DC
Output Current (mA) max/output	12000
Output Current Max. (A)	12
Output Power (W)	144W @ 12V, 288W @ 24V
Power Supply	N/A
LED Outputs	1

Lighting

Color Range	Single Color
-------------	--------------

Control

Output Signal	PWM-CV
Control	0-10V
Dimming Range	0-100%
Dimming Curve	Linear
Number of Channels	1

Protection

Reverse Polarity	Yes
LED Output Short	Yes
Overload	Yes
Restart after Protection	Yes

Environmental

Operating Temperature	-30 ~ +55 °C
Ingress Protection	IP20

CE FCC IP20 5^{year} warranty

Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.

DIN-Rail 1-10V LED Dimming Driver

0-144...288W 12A 12-24Vdc

- Dimming interface: 0- 10V, 1- 10V, 10V PWM or push button
- PWM digital dimming, no alter LED color rendering index.
- Dimming range from 0-100%, LED start at 0.1% possible.
- Max. current output: 12A.
- Short circuit / Over load protection.
- Full protective plastic housing.
- Suitable for indoor environments.



FC CE RoHS




warranty
5 years

Main Characteristics

Dimming Interface: 0-10V, 1-10V, 10V PWM or push button
 Input Voltage: 12-24Vdc
 Output Voltage: 12-24Vdc
 Output Current: 12A×1CH
 Max. Output Power: 0-144W...288W
 Dimming Range: 0-100%, LED start at 0.1% possible.


Mounting: DIN-Rail or Screw
 Working Temperature: -30°C~55°C
 Product Size: L112×W35×H67(mm)
 Package Size: L114×W37×H70(mm)
 Weight(G.W.): 125g


Dimensions




DIN-Rail mounting size:
TS-35/7.5 or TS-35/15

System Connection Diagram:

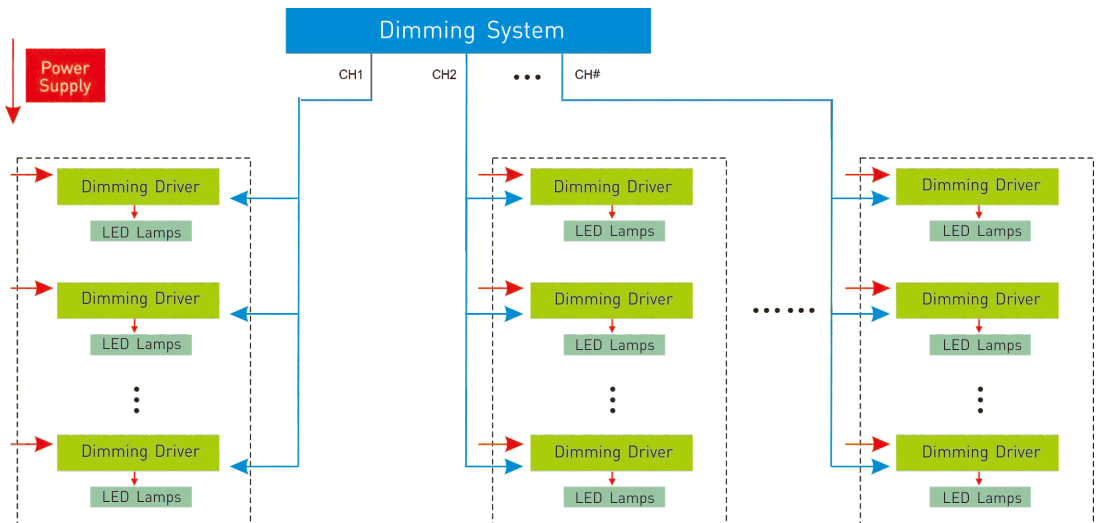

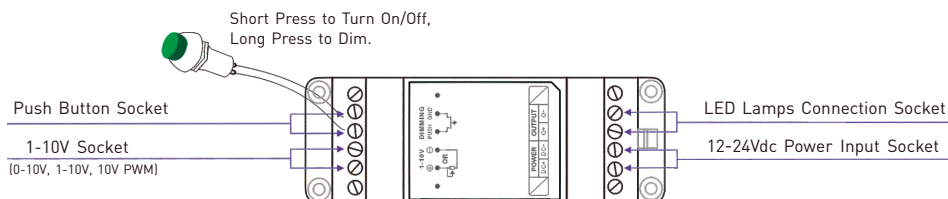

12V lamp connected, loads 0~144W(12V).

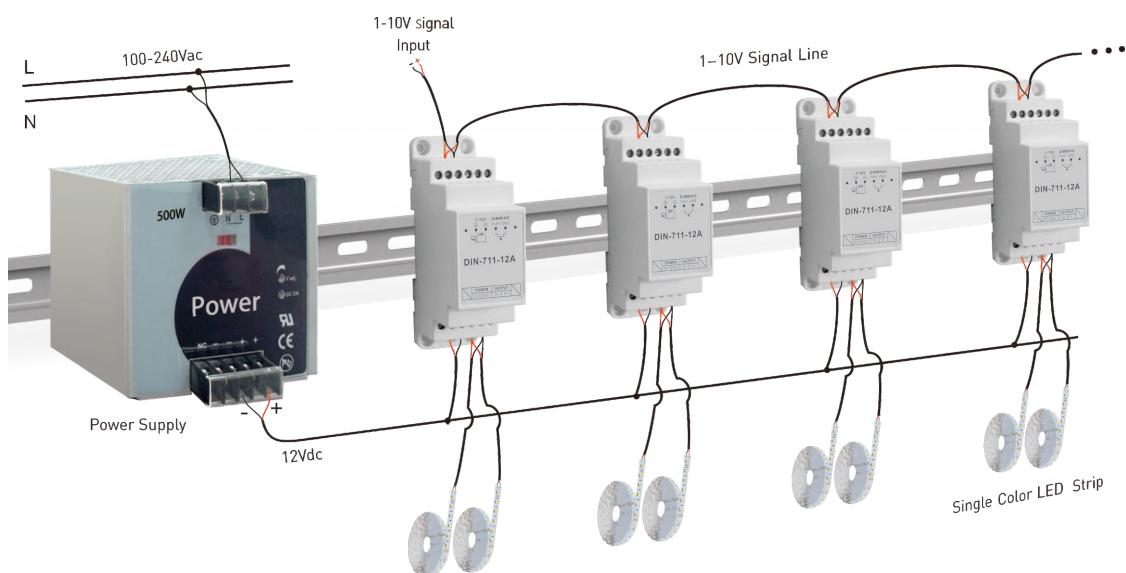

24V lamp connected, loads 0~288W(24V).

