


Dynamic Light Surface

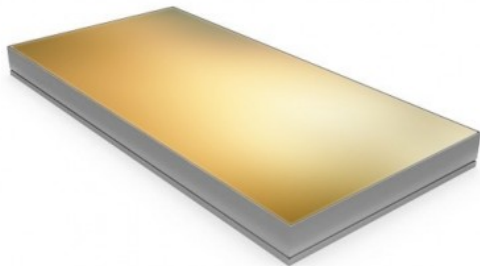

General

Depth (mm)	90
Cover	Fabric
Housing Material	Aluminum

Electronics

Input Voltage	100 ~ 240V AC
Power Supply	Internal

Lighting

Optics (°)	Lambertian
LED Type	SMD5050
LED Spacing (mm)	38
LEDs per Pixel	1
Pixel Pitch	~H38 ~V40
Color Range	RGB

Environmental

Operating Temperature	+5 ~ +40 °C
Ingress Protection	IP40




IP40

Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.



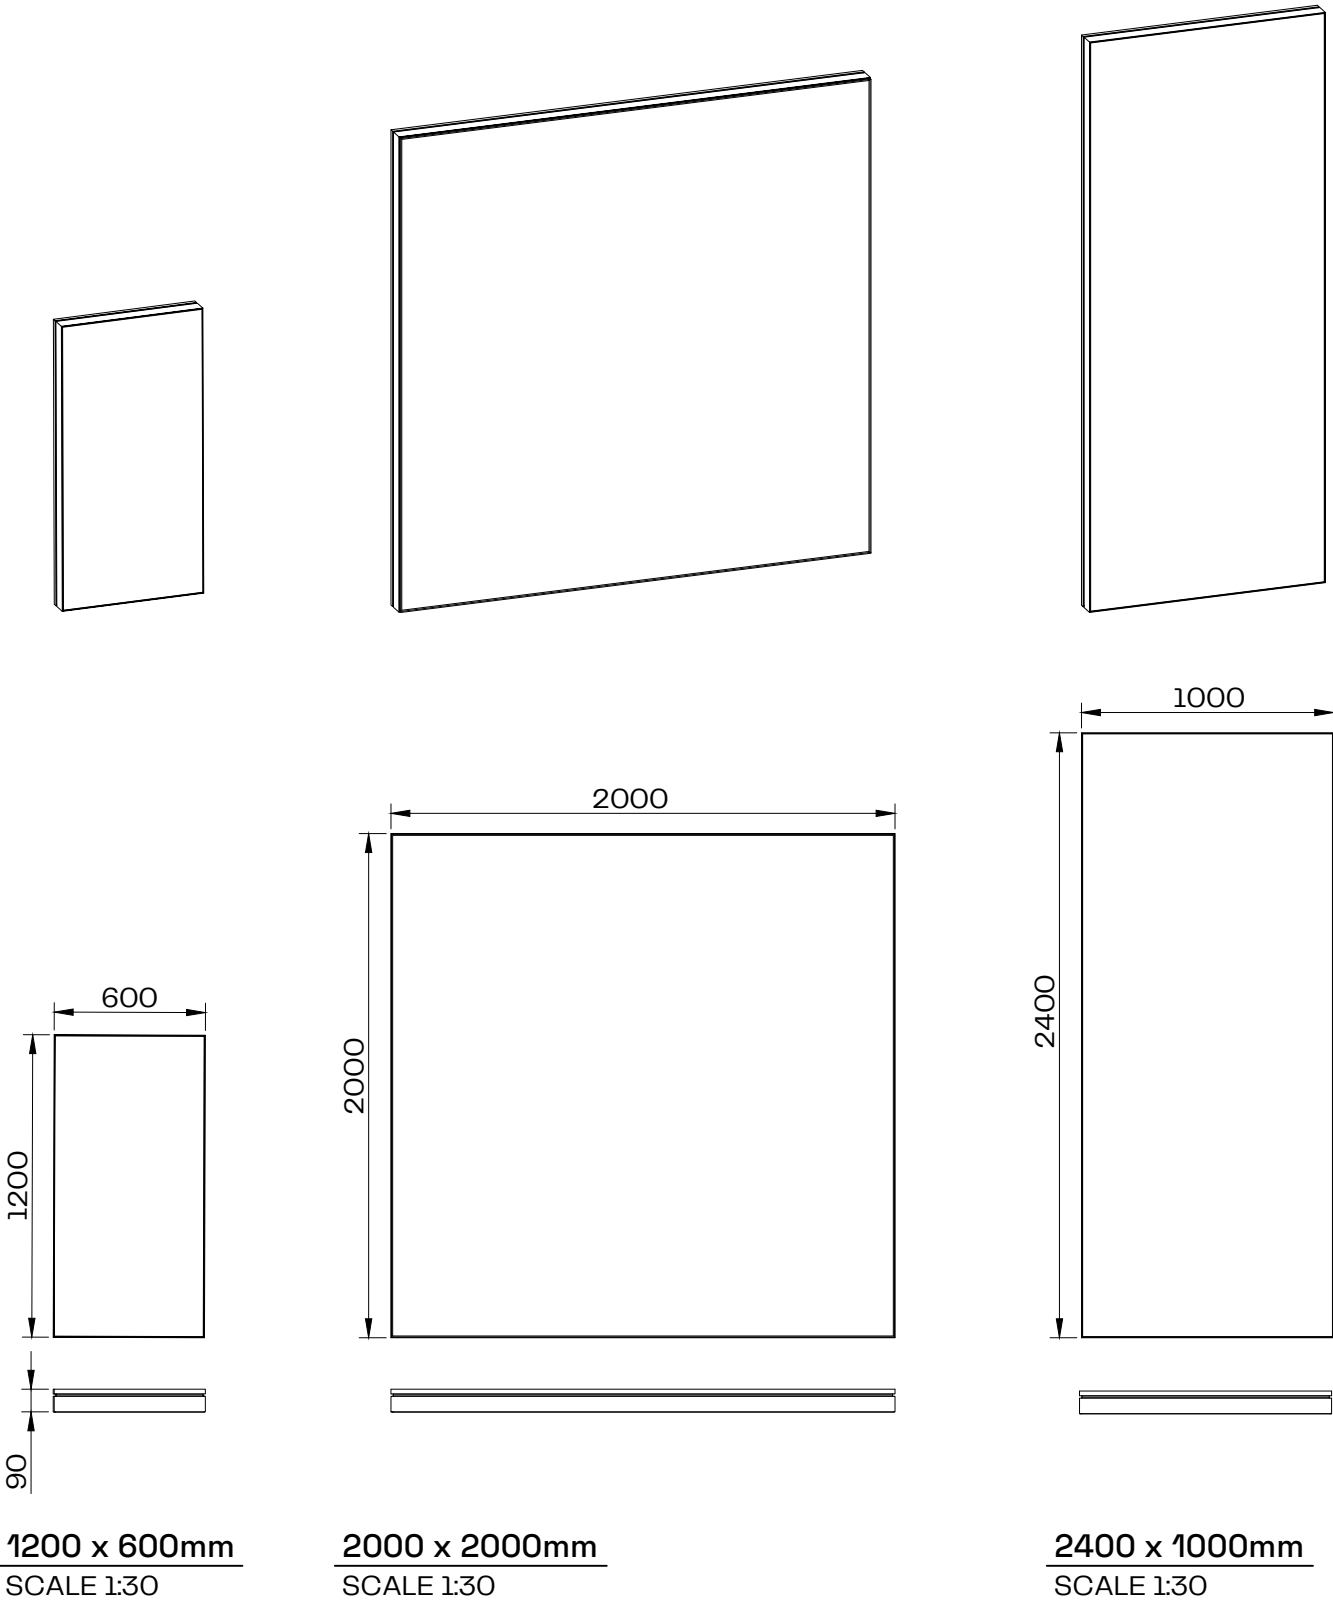

Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.