



General

Product Type	Constant Voltage Driver
Length (mm)	300
Width (mm)	122
Height (mm)	39
Housing Color	Black
Housing Material	Metal
Mounting	Surface mounted
Weight (g)	1200

Electronics

Input Domain	DC
Input Voltage	12 ~ 24V DC
Output Voltage	12 ~ 24 V DC
Output Current (mA) max/output	3000
Output Current Max. (A)	72
Output Power (W)	864W @ 12V, 1728W @ 24V
Power Supply	N/A
LED Outputs	24

Lighting

Color Range	RGB
-------------	-----

Control

Output Signal	PWM-CV
Control	DMX
RDM Support	Yes
Dimming Range	0~100%
Driver Configuration	Digital
Number of Channels	24

Environmental

Operating Temperature	-30 ~ +65 °C
Ingress Protection	IP20

CE IP20 5 year warranty

Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.




LTECH

DMX512 DECODER

LT-924-OLED

24
CHANNELS

OLED display
8 bit / 16 bit
4 kinds of DMX interfaces
Dimming Curve: 0.1~9.9
Shortcut / Over load protection

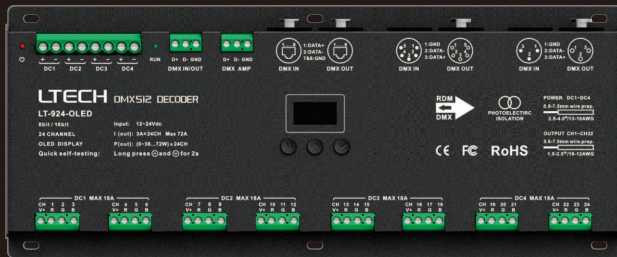


www.ltech-led.com

www.ltech-led.com

LTECH

Product Introduction:

1. Designed for Hi-power multiple channels application, 24 channels output, and Max. 3A current per channel, up to 1728W output power.
2. Easy operation with OLED screen and the touch buttons.
3. 3 kinds of mode optional: single color, color temperature, RGB.
4. Support 4 kinds of DMX ports with signal isolation function: 3-pin XLR, 5-pin XLR, RJ45 and green terminal (with signal amplifier function).
5. With RDM remote management protocol, the operations can be completed via the RDM master console, such as parameters browsing & setting, DMX address setting, equipment recognition, etc.
6. With photoelectric isolation function.
7. With shortcut protection and over load protection, as well as warning function when fault.
8. With fast self-testing function.
9. 16bit (65536 levels) / 8bit (256 levels) grey level optional.
10. Multiple dimming curve (0.1~9.9) optional.

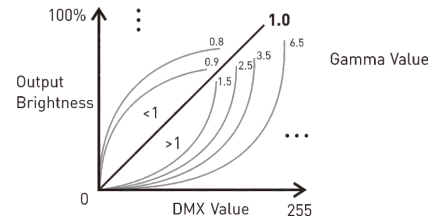

3-pin XLR



5-pin XLR



RJ45



RDM



Photoelectric Isolation



Shortcut Protection



Over load Protection



Display

Technical Specs:


Model :	LT-924-OLED
Input Signal :	DMX512/RDM
Input Voltage :	12~24Vdc
Current Load :	3A × 24CH Max 72A
Output Power :	[0~36W...72W] × 24CH Max. 1728W
DMX Interface :	3-pin XLR, 5-pin XLR, RJ45, Green terminal
Control Mode :	Dimming/CT/RGB
Dimming Curve :	0.1~9.9
Grey Level :	8bit (256 levels) / 16bit (65536 levels)
Photoelectric Isolation :	Yes
Protection:	Shortcut / Over load
Working Temperature :	-30°C~65°C
Dimensions :	L300×W122×H39mm
Package Size :	L313×W127×H41mm
Weight (G.W.) :	1180g

FC CE RoHS




(warranty)
5 years



Product Size:

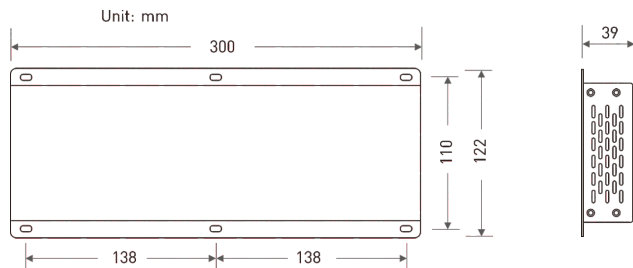

Main Component Description:

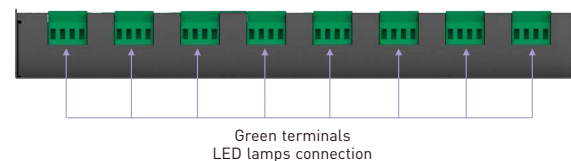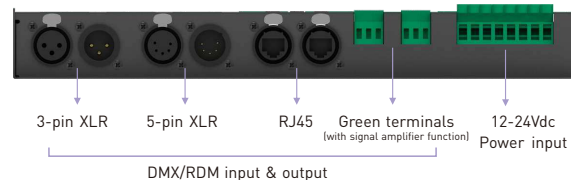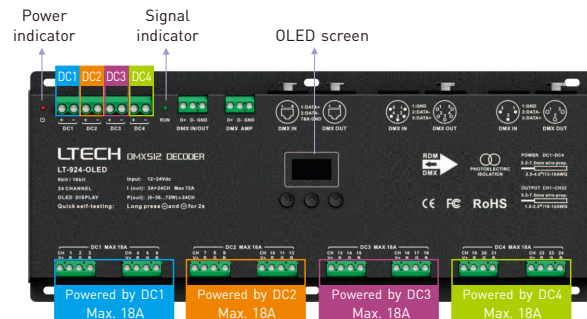

OLED Screen Interface:



M ^ v

Press "M" key, switch entries.
Long press "M" key, back to main page.
Press "^" or "v" key, parameter adjustment.
Exit: back to previous page.

1. DMX Address Setting

DMX: 001 Hz: High
Mode: RGB 8bit
Curve: Standard
Dim: Smo TOOL&v

Main page

Press "^" or "v" key to set DMX address.
Range: 001-512

2. PWM Frequency

DMX: 001 Hz: High
Mode: RGB 8bit
Curve: Standard
Dim: Smo TOOL&v

Press "^" or "v" key to choose.

Optional :

Std (standard)

High

Mid (middle)

Low

Smooth and delicate,
human eye
is comfortable.

* It is recommended to
use standard.

No flicker in
video camera.

3. Mode

DMX: 001 Hz: High
Mode: RGB 8bit
Curve: Standard
Dim: Smo TOOL&v

Press "^" or "v" key to choose.

Optional : Dim

CT

RGB

4. Grey Level

DMX: 001 Hz: High
Mode: RGB 8bit
Curve: Standard
Dim: Smo TOOL&v

Press "^" or "v" key to choose.

Optional : 8bit

16bit (choose it if the master
controller support this function)

5. Dimming Curve

DMX: 001 Hz: High
Mode: RGB 8bit
Curve: Standard
Dim: Smo TOOL&v

Press "^" or "v" key to choose.

Optional : Standard

Linear

0.1~9.9

It is recommended to use standard,
0.1-9.9 is for special requirements.

6. Enhance Dimming

DMX: 001 Hz: High
Mode: RGB 8bit
Curve: Standard
Dim: Smo TOOL&v

Press "^" or "v" key to choose.


Optional : Std (standard)

Smo (smooth)

* It is recommended to use standard.

Smo: This option with smooth processing, realize
the dimming flicker-free and dynamic effects
more downy.


7. Tool

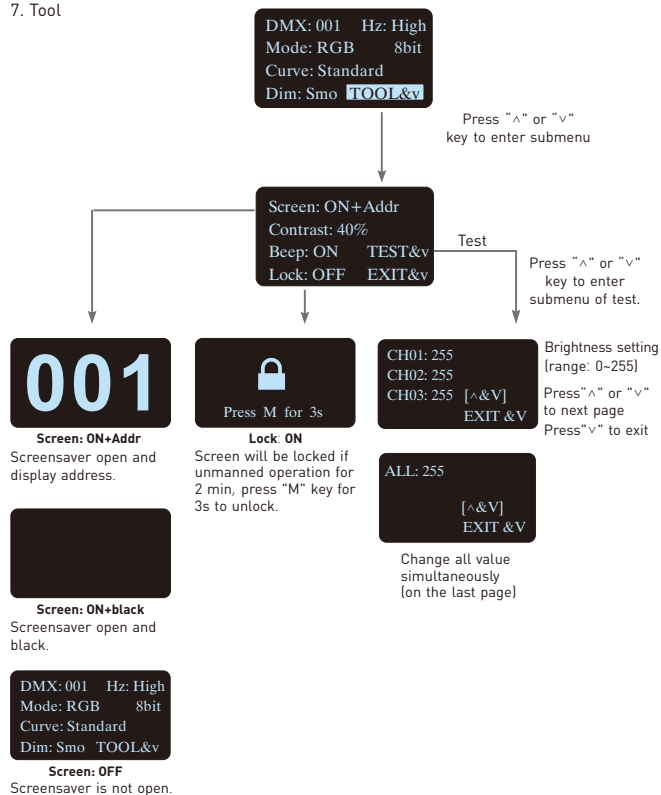

* Fast self-testing function: press "∧" or "v" keys simultaneously for 2-3 seconds under any page, decoder will enter self-testing function.


Wiring Diagram:




1. DMX console connection:

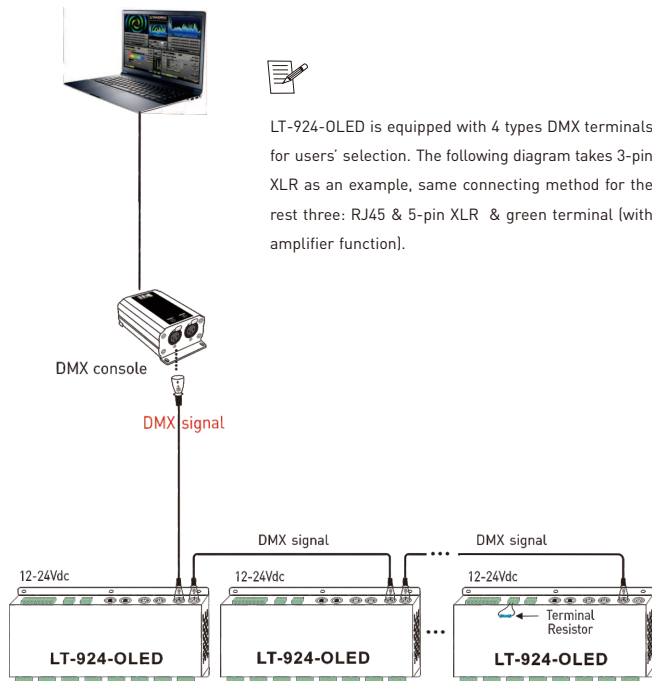


* If the recoil effect occurs because of longer signal line or bad line quality, please try to connect 0.25W 90-120Ω terminal resistor at the end of each line.

2 Connecting LED lights:

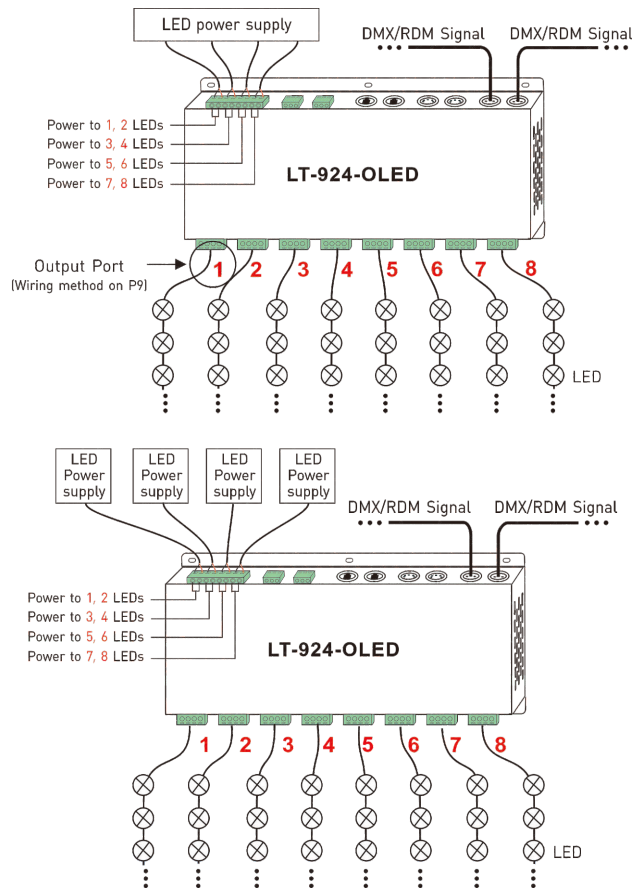


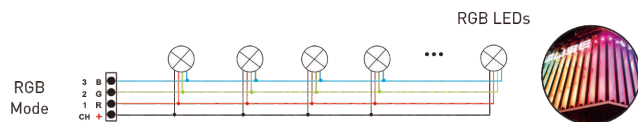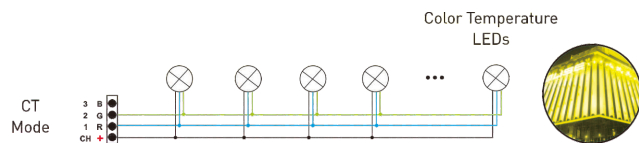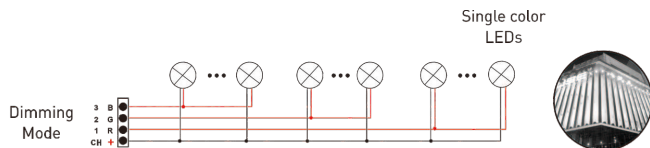


3. The connection diagram of 4 kinds of DMX/RDM terminals:




5-pin XLR Connected in Parallel



3-pin XLR Connected in Parallel



Green Terminal Connected in Parallel



Installation distance > 20mm


RJ45 Connected in Parallel

These 4 terminals can be connected in a mixed way.

***Installation Attention :** please reserve enough ventilation distance between decoders (>20mm), be sure not to block the vent, or will affect lifetime of decoder for poor heat dissipation.

4. The connection diagram of AMP signal amplifier terminal:

- * Connecting with green terminal or an extra amplifier will be needed when more than 32 decoders are connected or use overlong signal wire(as shown below).
Signal amplifier should not be more than 5 times continuously.

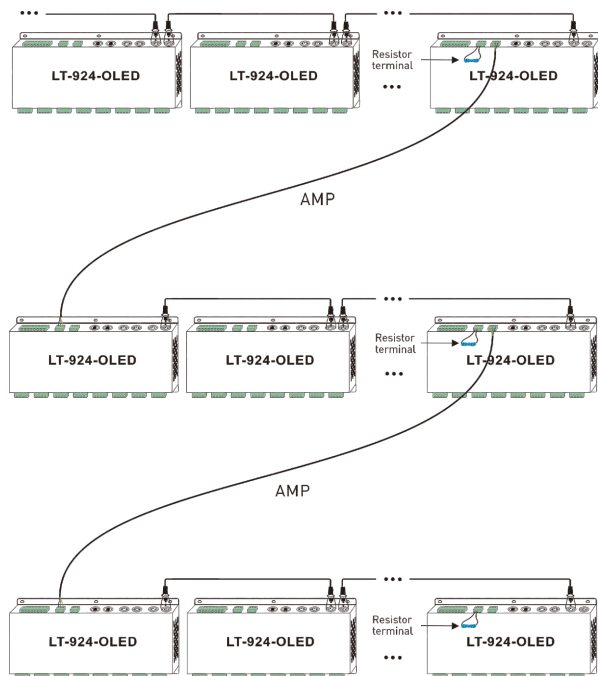

Address setting table

Mode	DIM	CT	RGB
Address Quantity	8	16	24
Resolution	8bit	8bit	8bit
Channel	1	001	001 001
	2	001	002 002
	3	001	002 003
	4	002	003 004
	5	002	004 005
	6	002	004 006
	7	003	005 007
	8	003	006 008
	9	003	006 009
	10	004	007 010
	11	004	008 011
	12	004	008 012
	13	005	009 013
	14	005	010 014
	15	005	010 015
	16	006	011 016
	17	006	012 017
	18	006	012 018
	19	007	013 019
	20	007	014 020
	21	007	014 021
	22	008	015 022
	23	008	016 023
	24	008	016 024

Mode	DIM	CT	RGB
Address Quantity	16	32	48
Resolution	16bit	16bit	16bit
Channel	1	001 002	001 002 001 002
	2	001 002	003 004 003 004
	3	001 002	003 004 005 006
	4	003 004	005 006 007 008
	5	003 004	007 008 009 010
	6	003 004	007 008 011 012
	7	005 006	009 010 013 014
	8	005 006	011 012 015 016
	9	005 006	011 012 017 018
	10	007 008	013 014 019 020
	11	007 008	015 016 021 022
	12	007 008	015 016 023 024
	13	009 010	017 018 025 026
	14	009 010	019 020 027 028
	15	009 010	019 020 029 030
	16	011 012	021 022 031 032
	17	011 012	023 024 033 034
	18	011 012	023 024 035 036
	19	013 014	025 026 037 038
	20	013 014	027 028 039 040
	21	013 014	027 028 041 042
	22	015 016	029 030 043 044
	23	015 016	031 032 045 046
	24	015 016	031 032 047 048