LED Controller WiFi DMX - WiFi-101-DMX4

2256900




General	
Product Type	Controller, Wireless
Length (mm)	125
Width (mm)	33
Height (mm)	20
Housing Color	White
Housing Material	Plastic
Mounting	Surface mounted
Weight (g)	70
Electronics	
Input Domain	DC
Input Voltage	12 ~ 24V DC
Output Voltage	12 ~ 24 V DC
Power Supply	N/A
LED Outputs	4
Lighting	
Color Range	RGBW
Control	
Output Signal	DMX
Control	DMX, Wifi, Radio Frequency
Remote Distance	350m
Environmental	
Operating Temperature	-30 ~ +55 °C
Ingress Protection	IP20

CE IP20 5^{year} warranty

Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice. 181



oneeighty

one.com

LTECH

WIFI LED CONTROLLER





16.7 million kinds of colors to choose Lights changing with the music Intelligent lighting timing set Limitless long-range control DIY Scene Model




Product Parameters

Product Name :	WiFi LED Controller
Model :	WiFi-101-DMX4
Input Voltage :	12~24Vdc
Output :	DMX512, 512CH
Working Temperature : -30°C ~ 55°C	
Protocol :	2.4GHz Wi-Fi, 802.11b/g/n
Dimension :	L125 x W33 x H20(mm)
Packing :	L127 x W35 x H24(mm)
Net Weight :	52g
Gross Weight :	70g





Product Structure

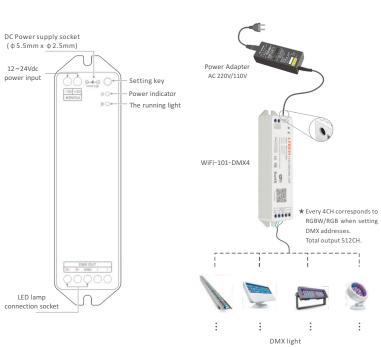

Product Installation

Attention

1.The product shall be installed and serviced by the gualified person.

2.This product is non-waterproof. Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.

3.Good heat dissipation will prolong the working life of the controller. Please ensure good ventilation.

4.Please check if the output voltage of the LED power supply used comply with the working voltage of the product.

 Please ensure that adequate sized cable is used from the controller to the LED lights to carry the current. Please also ensure that the cable is secured tightly in the connector.

6.Ensure all wire connections and polarities are correct before applying power to avoid any damages to the LED lights.

7.If a fault occurs please return the product to your supplier. Do not attempt to fix this product by yourself.

 This manual only applies to this model. We reserve the right to make changes without prior notice.

DMX4

LTECH

WIFI LED CONTROLLER

Operating Instruction



Operating Schematic

Operating Guidance

Open WLAN via mobile phone, connect to the wireless router.



2 Scan QR Code to download the APP via mobile phone.



After installation, the strip flashes within 30s when powered on and then the controller is ready to the configuration status accordingly.

3


4 Turn on APP, enter "My Device" interface, click" + "icon.

0 ------

9:41 AM

My device

5 Enter the interface "To select a device", choose "Color light" and follow the prompts to connect. 6 Once successfully connect to the device that will immediately open intelligent life and realize long-distance control via mobile phone.

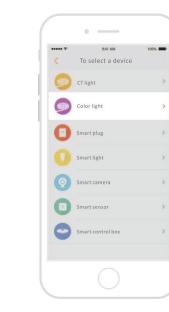

• -----...... 9:41 AM 100% My device Ċ. Color light S Online