LED Dimmer Touch RGB - E3



2253300


General	
Product Type	Controller
Length (mm)	86
Width (mm)	86
Height (mm)	36
Housing Color	White
Housing Material	PC
Mounting	Built-in
Weight (g)	225
Electronics	
Input Domain	DC
Input Voltage	12 ~ 24V DC
Output Voltage	12 ~ 24 V DC
Output Current (mA) max/output	4000
Output Current Max. (A)	12
Output Power (W)	144W @ 12V, 288W @ 24V
Power Supply	N/A
Lighting	
Color Range	RGB
Control	
Output Signal	PWM-CV
Control	Radio Frequency
Zones	1
Number of Channels	3
Functions	programmable
Environmental	
Operating Temperature	-20 ~ +55 °C
Ingress Protection	IP20

(€ IP20

Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.

181



oneeighty

one.com



LTECH


LTECH

Uninstall





Manual www.ltech-led.com

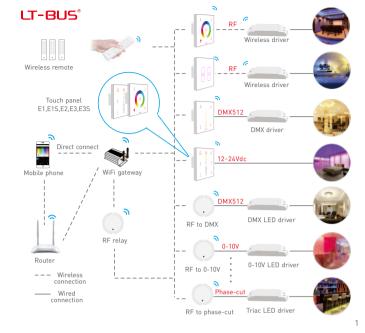

Product features

- LTECH
- 2 in 1 function: RF wireless control and PWM power output.
- Power output, lamps can be connected directly, easy and convenient.
- Touch keys with chord and LED indicator.
- Adopts capacitive touch control technology on the full color circle makes LED dimming selection more user-friendly.
- Touch panel can be controlled by remote directly or smart phone if add a gateway.


Technical specs

Model	E1	E1S	E2	E3	E3S	
House		210		20	200	
Control type	Dimming	Dimming	CT	RGB	RGB	
Input voltage	12-24Vdc					
Wireless frequency	RF 2.4GHz					
Current load	4A×2CH Max. 8A		Max. 4A	4A×3CH Max. 12A		
Output power	(0~48W96W) ×	2CH Max. 192W	0~48W96W	(0~48W96W)×3CH Max. 288W		
Protection	Short circuit / Over current protection, recover automatically.					
Working temp.	-20°C~55°C					
Dimensions	L86×W86×H36(mm)					
Package size	L113×W112×H50(mm)					
Weight(G.W.)	225g					



2

Installation instruction







86 size

European style


Product size Unit: mm



9



Key functions

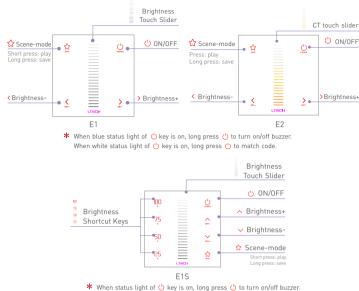

When status light of \bigcirc key is off, long press \bigcirc to take on only on buzze. When status light of \bigcirc key is off, long press \bigcirc to match code.

Match code sequence

WiFi router

Gateway

Remote

E series

touch panel

Match Code Sequence

 Configure gateway with touch panel, which enables the smart phone to control lamps via gateway.

LTECH


4

6

LTECH

- 2. Configure remote with touch panel, which enables remote to control lamps.
- PS: No WiFi router needed when gateway work with phones directly.

Application composition

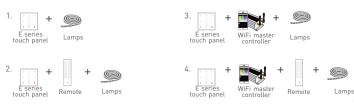

Lamps



★ When blue status light of ⁽⁾ key is on, long press ⁽⁾ to turn on/off buzzer. When white status light of ⁽⁾ key is on, long press ⁽⁾ to match code.



★ When blue status light of ⁽¹⁾/₂ key is on, long press ⁽¹⁾/₂ to turn on/off buzzer. When white status light of ⁽¹⁾/₂ key is on, long press ⁽¹⁾/₂ to match code.

Mode

ITECH

E3 panel's 2 scene-mode

APP's 1 & 2 scene-mode

changed by APP or panel

key, the scenes can be


keys are corresponding with WiFi-106 gateway

- 1. Static Red 2. Static Green
- 3. Static Blue
- 4. Static Yellow
- 5. Static Purple
- Static Cvan
- 7. Static White
- 8. RGB Jumping
- 9. 7 Colors Jumping
- 10. RGB Color Smooth
- 11. Full-color Smooth
 - 5

RF wireless wiring

Single Zone Control


Multiple Zones Control

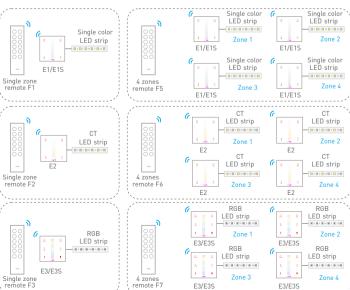


* Touch panels can be sync controlled by multi remotes, please refer to the manual of remote's usage.




Terminals

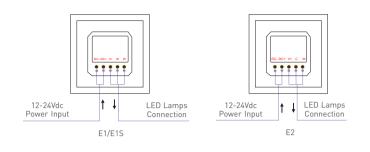




Match code between touch panel & remote

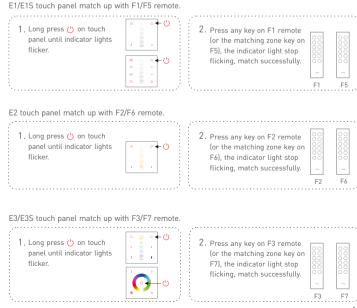


Wiring diagram


E.g 1: Connect with 12V Strip. Max 48W/CH(12V)

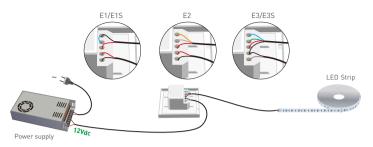

E.g 2: Connect with 24V Strip. Max 96W/CH(24V)

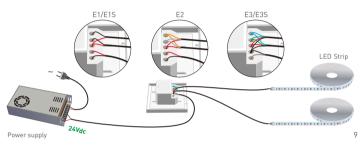

Match code between touch panel & gateway

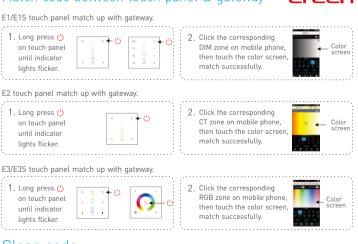

lear code

lights flicker.

lights flicker.

lights flicker.





8

LTECH