



General

Length (mm)	5000
Width (mm)	10
Height (mm)	2
Housing Color	White
Housing Material	Copper
Mounting	3M tape
Weight (g)	150
Cutting Interval (mm)	62.5
Cable Length (cm)	15 cm

Electronics

Input Voltage	24 V DC
Power Consumption (W/m)	19.2
Power Supply	N/A
Energy Class	A+
Luminous Efficacy	123 lm/W

Lighting

Emission	Direct
Optics (°)	120
LED Type	SMD2835
LED Quantity /m	128
LED Spacing (mm)	7.8
Color Range	White
Color Temperature (Kelvin)	4000 K
Colour Rendering Index (CRI)	? 90
SDCM	3
Luminous Flux	2360 lm/m
TM-21 Projection	L70 @ 85 °C (LM80-08), Reported 36000, Calculated 50000,

Control

Control	PWM
Control Units	Single pixel
Number of Channels	1

Environmental

Storage Temperature	-40 ~ +80 °C
Operating Temperature	-25 ~ +60 °C
Ingress Protection	IP20
Safety Standards	EN 62031, IEC 62471




IP20 5 year warranty

Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.



oneeighty
one.com

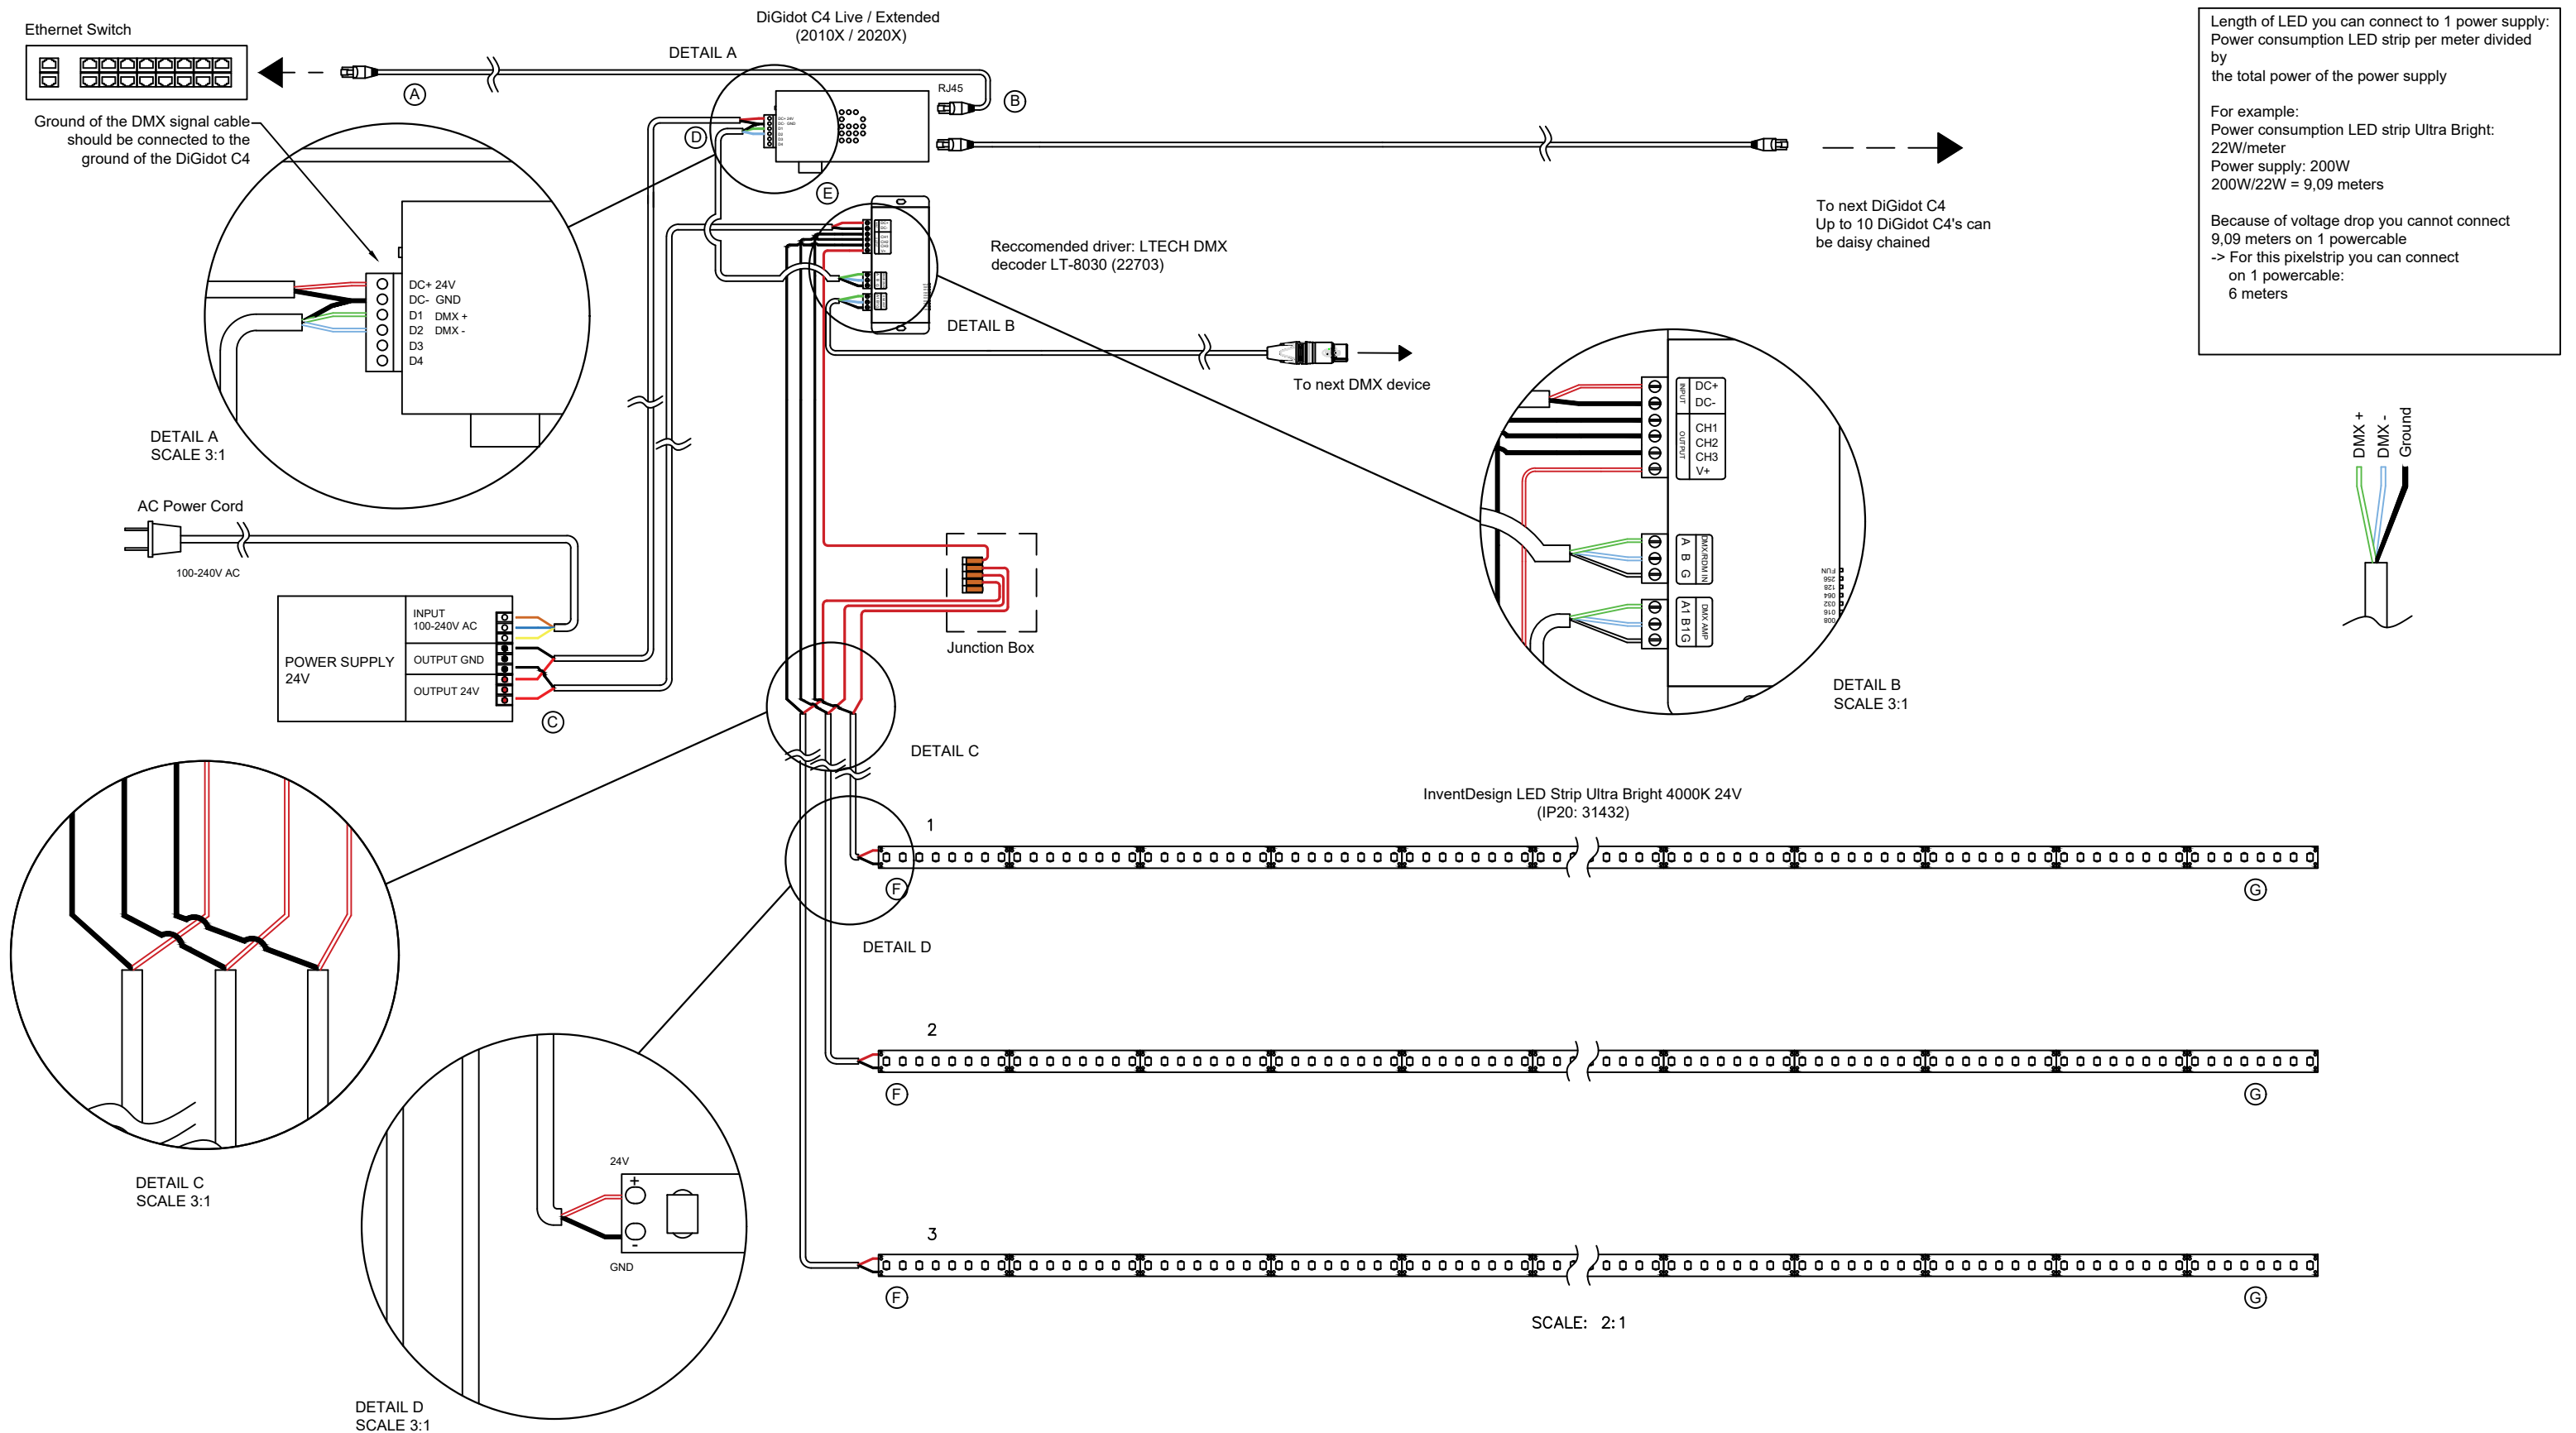

Cable Coding

Color	Function
Brown	L
Blue	N
Yellow	PE
Red	V+
Black	GND
Green	DMX +
Light blue	DMX -

Recommended cable lengths

Maximum length from A to B	100 meters	Cat 6 STP
Maximum length from C to D	5 meters	24V Power Cable 2x1MM2 (70103R)
Maximum length from D to E	100 meters	DMX Cable 110 OHM (70117)
Maximum length from E to F	5 meters	24V Power Cable 2x1MM2 (70103R)
Maximum length from F to G	6 meters	LED Strip

Maximum of 3 channel DMX controllers on 1 DiGidot C4

C4	Pixels	Article Nr.
Extended 1	170	20201
Extended 2	340	20202
Extended 4	680	20203
Extended 8	1360	20204
Live 4	680	20101
Live 8	1360	20102
Live 12	2040	20103

Please contact you're local InventDesign representative for project consultation

Note: If different setups or cable lengths are necessary you can always contact InventDesign and get advice for your particular setup

Disclaimer: No rights can be derived from the information provided on this sheet
Products can only be installed by professional installers


A3

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS

	NAME	DATE
DRAWN		03-1-2019
CHK'D		
REV	1.0	03-1-2019

ADVANCED SETUP

TITLE: WIRING DIAGRAM	
PRODUCT: LED Strip Ultra Bright	
SCALE: NOT TO SCALE SHEET 1 OF 2	

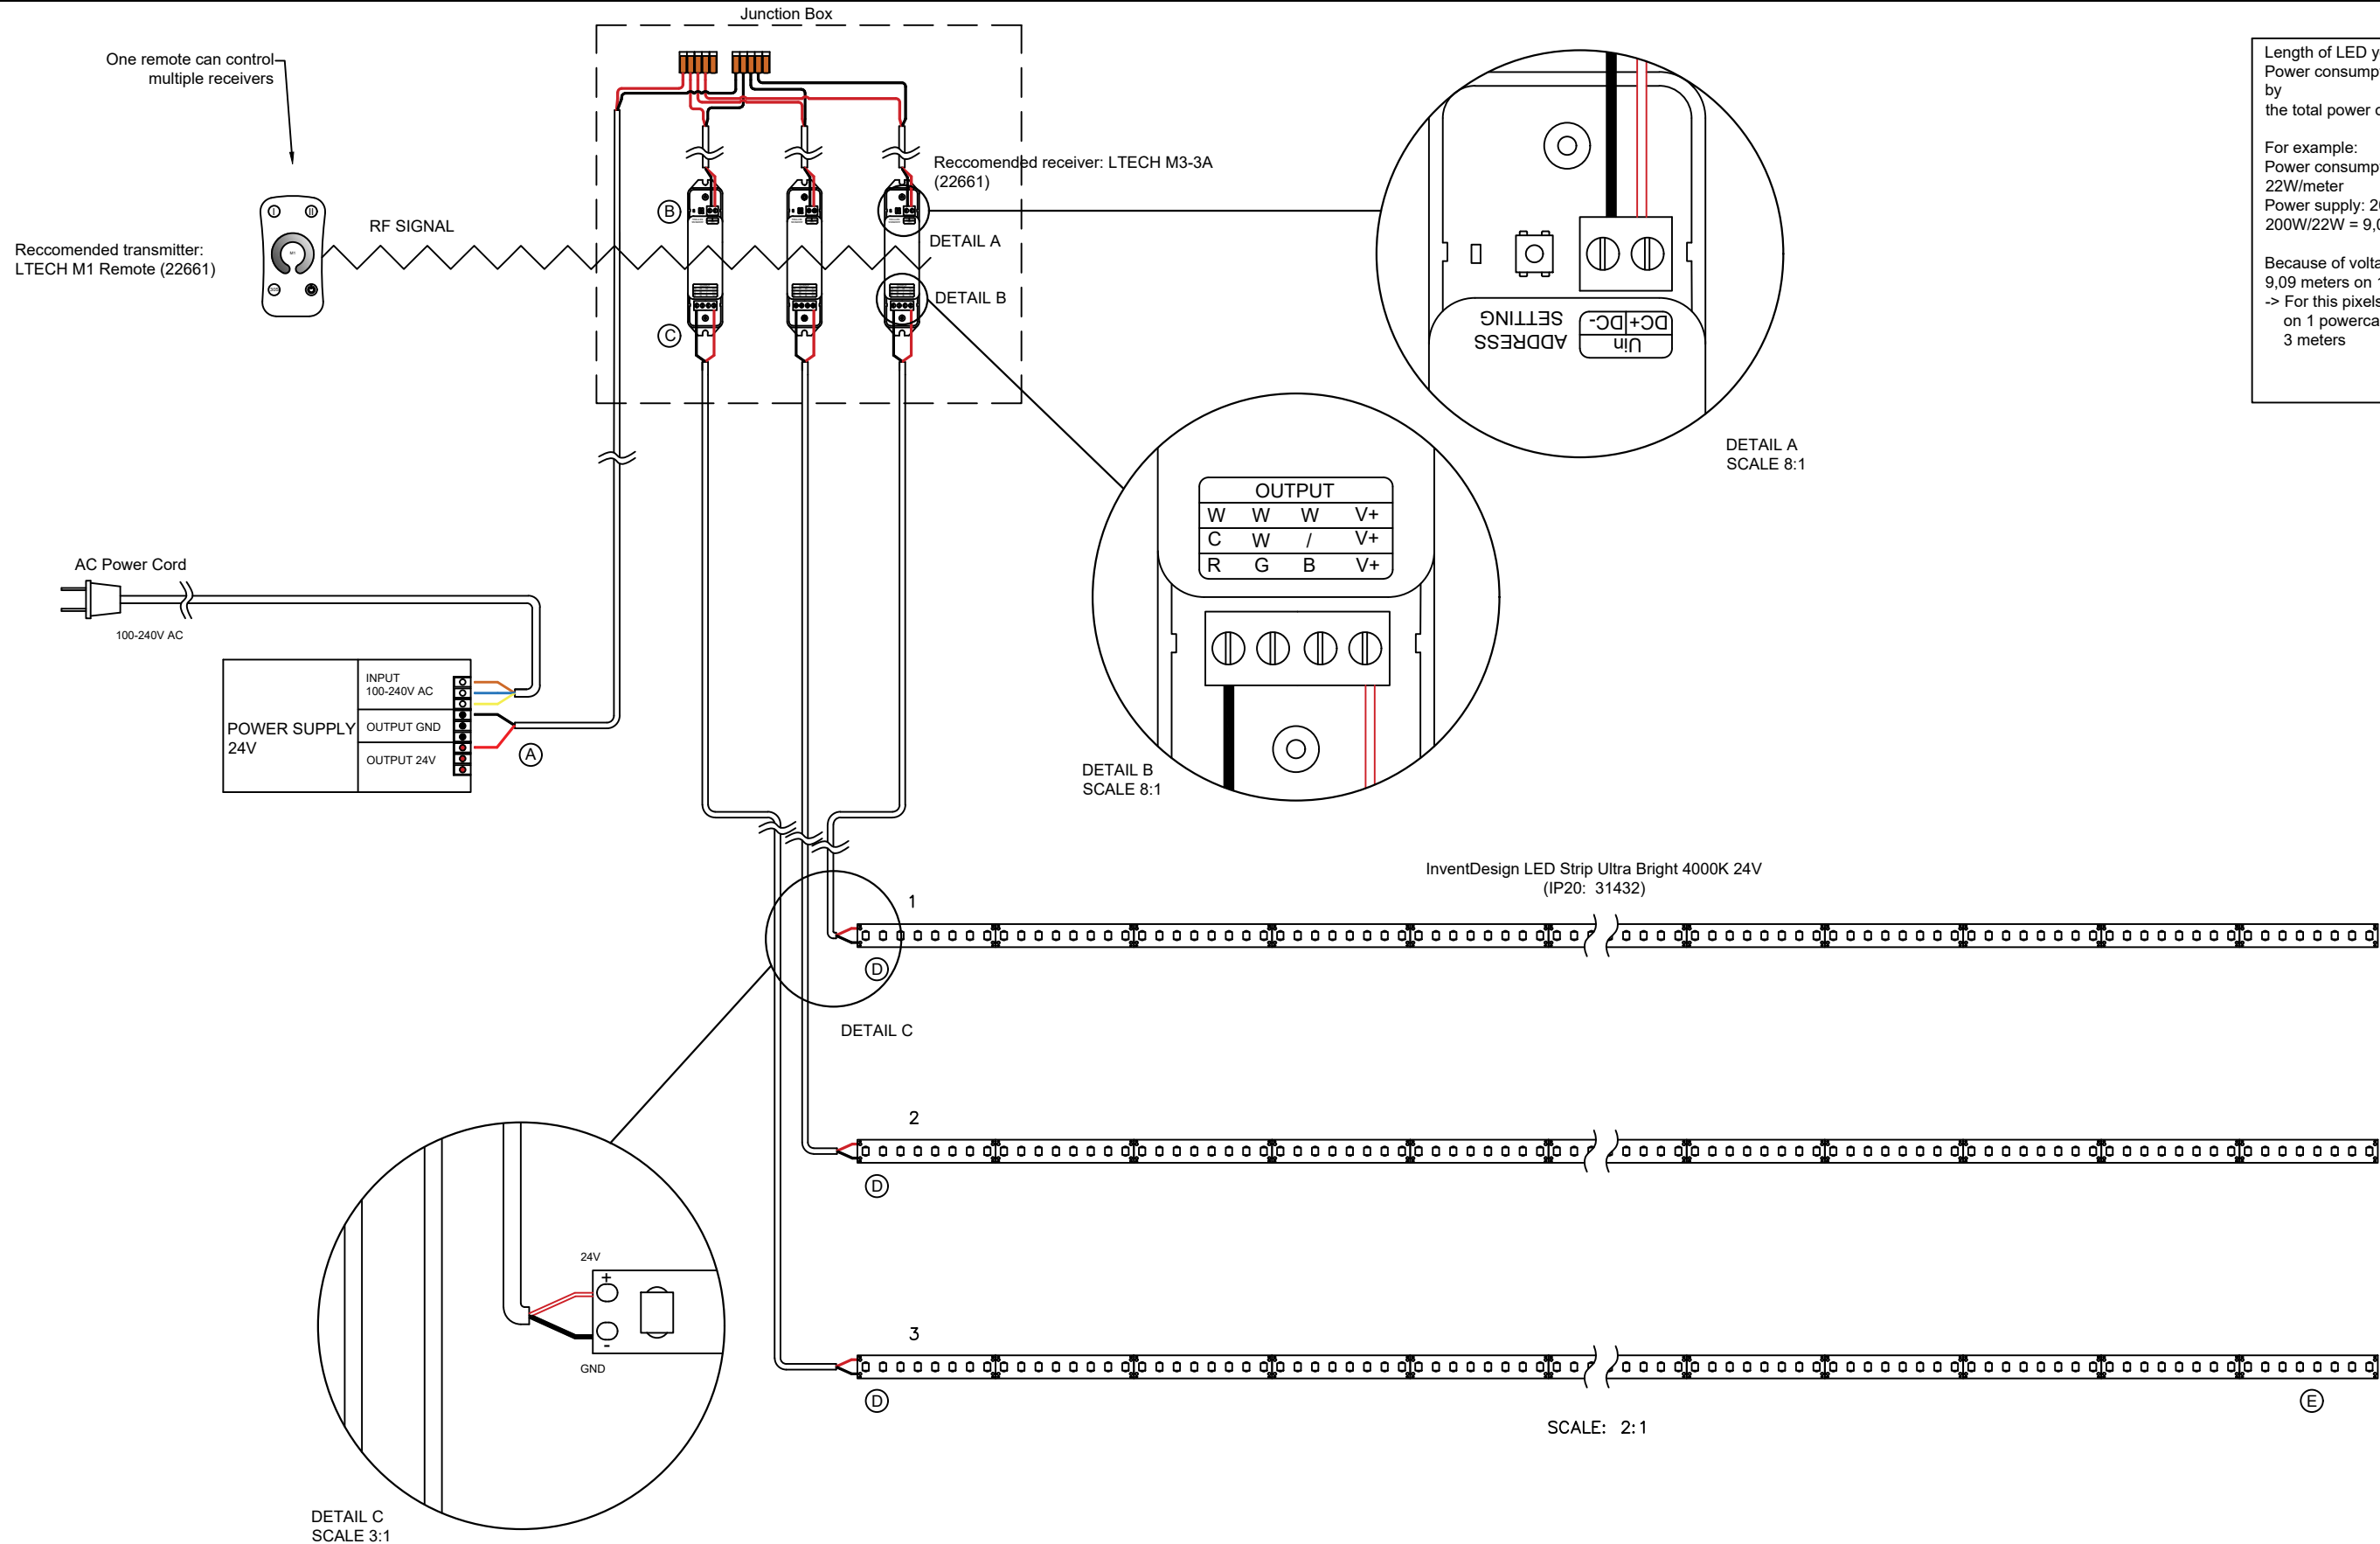

Length of LED you can connect to 1 power supply:
Power consumption LED strip per meter divided by
the total power of the power supply

For example:
Power consumption LED strip Ultra Bright:
22W/meter
Power supply: 200W
 $200W/22W = 9,09$ meters

Because of voltage drop you cannot connect
9,09 meters on 1 powercable
-> For this pixelstrip you can connect
on 1 powercable:
3 meters

Cable Coding

Color	Function
Brown	L
Blue	N
Yellow	PE
Red	V+
Black	GND
Green	
Light blue	

Recommended cable lengths

Maximum length from A to B	5 meters	24V Power Cable 2x1MM2 (70103R)
Maximum length from C to D	5 meters	24V Power Cable 2x1MM2 (70103R)
Maximum length from D to E	3 meters	LED Strip

Please contact you're local InventDesign representative for project consultation

Note: If different setups or cable lengths are necessary you can always contact InventDesign and get advice for your particular setup

Disclaimer: No rights can be derived from the information provided on this sheet
Products can only be installed by professional installers

A3		NAME	DATE	
	DRAWN		03-1-2019	
	CHK'D			TITLE: WIRING DIAGRAM
	REV	1.0	03-1-2019	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS	BASIC SETUP			PRODUCT: LED Strip Ultra Bright
				SCALE: NOT TO SCALE SHEET 1 OF 2