### LED Dimmer 1-10V - E610



General	
Product Type	Controller
Length (mm)	86
Width (mm)	86
Height (mm)	50
Housing Color	White
Housing Material	PC
Mounting	Built-in
Weight (g)	220
Electronics	
Input Domain	AC
Input Voltage	100 ~ 240V AC
Power Supply	Internal
LED Outputs	1
Input Frequency	50 ~ 60Hz
Lighting	
Color Range	Single Color
Control	
Output Signal	1~10V
Control	0-10V
Number of Channels	1
Environmental	
Operating Temperature	-10 ~ +50 °C
Ingress Protection	IP20





Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice. 181

# 2259000

OneEightyOne Valschermkade 27 - 28 | 1059CD | Amsterdam +31 20 8200170 | info@oneeightyone.com | www.oneeightyone.com oneeighty

one.com

LTECH


E610 1-10V Dimmer

### LTECH

2. Installation Instruction:

## **E610** 1-10V Dimmer



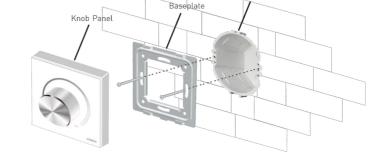



### 1. Technical Specs:

#### E610 1-10V Dimmer

Control Voltage:	90~250Vac, 50-60Hz	Worki
Output:	1~10V	Dime
Control Current:	Max. 50mA	Packa
Switching Current:	Max. 5A	Weigh

Working Temp.:	-10℃~35℃
Dimensions:	L86×W86×H50(mm)
Package Size:	L106×W106×H60(mm)
Weight(G.W.):	220g



Typical back box as follow:

Back Box






2




**E6O** 1-10V Dimmer

### LTECH

3. Product Size:






4. Knob Function:





5. Terminals:




6. Wiring Diagram:

(1)







12mm

.

50mm

25mm

WWW.LTECHONLINE.COM

(3)