

General

Wire Strip Length 5mm
Wire Type 2.5mm2

Electronics

Input Domain	AC
Input Voltage	100 ~ 240V AC
Output Voltage	12V DC
Output Current Max. (A)	6.25
Output Power (W)	75W @ 12V
Power Factor at Full Load	+0.95 @ 230VAC, +0.99 @ 115VAC
Power Supply	Internal
Input Frequency	50Hz, 60Hz
Inrush Current	60A @ 230VAC

Lighting

Color Range Single Color

Control

Output Signal	PWM-CV
Control	0-10V
Dimming Range	0~100%
Dimming Curve	Linear
Number of Channels	1
Functions	Push DIM

Protection

Reverse Polarity	Yes
LED Output Short	Yes
Overload	Yes

Environmental

Operating Temperature	-30 ~ +60 °C
Ingress Protection	IP20

CE IP20 2 year warranty

Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.



oneeighty one.com



75W

6.25A

Joseph House of the Company of the C



12V DC

LED Intelligent Driver

• Dimming interface: 1-10V (0-10V/10VPWM/resistor), Push Dim.

- PWM digital dimming, no alter LED color rendering index.
- High frequency PWM dimming, no flicker in video camera.
- Dimming range from 0-100%, LED start at 0.1% possible.
- Power factor > 0.99, Efficiency > 85%.
- Short circuit / Over-heat / Over load / Over Voltage protection.
- Compliant with Safety Extra Low Voltage standard.
- Suitable for indoor environments.









 $(\epsilon$



RoHS







Main Characteristics

PUSH DIM

Dimming Interface: 1-10V (0-10V/10VPWM/Resistor), Push Dim

Input Voltage Range: 100-240Vac ±10%

Frequency: 50/60Hz

Input Current: 115Vac≤0.9A, 230Vac≤0.45A

Power Factor PF>0.99/115Vac , PF>0.95/230Vac, at full load

THD: ≤9% at 115Vac, ≤12% at 230Vac (full load)

Efficiency: ≥85%

Inrush Current(typ.): Cold start 60A at 230Vac

Leakage Current: I/P-0/P: <0.5mA/230Vac, I/P-GND: <0.75mA/230Vac

Output Current: Max. 6.25A Output Voltage: 12Vdc Output Voltage Range: 12Vdc ±0.5Vdc

Ripple & Noise: ≤200mV Output Power: Max. 75W Output Power Range: 1~75W

Overload Power Limitation: ≥102%~125%

Dimming Range: 0~100%, LED start at 0.1% possible.

tc: 85°C ta: -30°C ~ 60°C Working Temperature .: Working Humidity: 20 ~ 95%RH, non-condensing Storage Temp., Humidity: -40 ~ 80°C, 10~95%RH

Temp. Coefficient: ±0.03%/°C(0-50°C)

Vibration: 10~500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes

Protection

Over-heat Protection: Shut down the output when PCB temp.≥110°C, auto recovers when temp. back to normal.

Over Voltage Protection: Shut down the output when non-load Voltage ≥13~18V, re-power on to recover after fault

condition is removed.

Over Load Protection: Shut down the output when Current Load≥ 102%~125%, auto recovers after faulty condition

Short Circuit Protection: Shut down automatically if short circuit occurs,

auto recovers after faulty condition is removed.

Safety & EMC

Withstand Voltage: I/P-0/P: 3750Vac

Isolation Resistance: I/P-0/P: 100MΩ/500VDC/25°C/70%RH Safety Standards: IEC/EN61347-1, IEC/EN61347-2-13

EMC Emission: EN55015, EN61000-3-2 Class C, IEC61000-3-3

EMC Immunity: EN61000-4-2,3,4,5,6,8,11 EN61547

Others

204×62×34mm(L×W×H) Dimension: 206×64×39mm(L×W×H) Packing:

490q±10q Weight(G.W.):

Dimensions






Connections





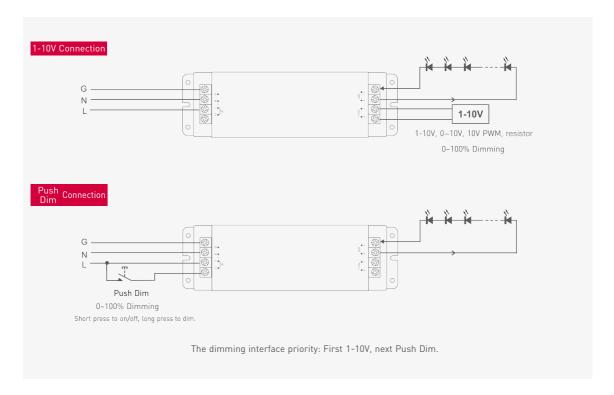

Push Dimming



Reset Switch

- On/off control: Short press.
- Stepless dimming: Long press.
- With every other long press, the light level goes to the opposite direction.

2

• Dimming memory: Brightness will be the same as previously adjusted when turning off and on again.